somfy®

DRAPERY ORDER FORM & RESOURCES

Date of Order: _____ Account # _____

P/O #: _____ Sidemark: _____ Special Shipping Directions: _____

SHIPPING

Sold To:

Business Name: _____

Address: _____

City: _____ Province: ___ Postal Code: _____

Phone: _____ Fax #: _____

Email: _____

Ordered By: _____

Signature: _____

Ship To:

Business Name: _____

Address: _____

City: _____ Province: ___ Postal Code: _____

Contact Name: _____

Phone: _____ Fax #: _____

Email: _____

ORDER DETAIL: Please see next page for glossary and definition of terms.

Item #	Room	QTY.	❶ Motor Part#	❷ Width (in.)	❸ Tandem	❹ Motor Side	❺ Track Type*	❻ Track Color	❼ Stack (L/R/S)	❽ If Bent**: # of bends	❾ Carrier Type	❿ Bracket		⓫ Butt Master	⓬ Splice
												Part #	QTY.		
ex.	Living Room	1	1246116	144	Y/N	L	F	WHT/ BRZ	S	2	RF80	1780907	7	NO	X
1															
2															
3															
4															
5															
6															

** For curved tracks, Somfy requires a template. Please see Directions for Creating a Template for Drapery Curves.*

*** For bent tracks, Somfy does not require a template. Please include the Bent Drapery Tracks Measurement Form for exact measurements per angle and return.*

NOTE: Somfy includes a center splice every 16' of track. Please indicate in the "SPECIAL INSTRUCTIONS" section if your requirements differ from Somfy's standard.

CONTROLS: In the space provided below, please list the part number(s) for the control(s) you desire.

Given the nature of custom motorization products, control options and compatibility vary dramatically. If you would like further assistance with control options, simply note it in the field below, and one of our customer service specialists will contact you upon the submission of your order.

SPECIAL INSTRUCTIONS

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

© Somfy Systems, Inc. • JUNE 2026

(Continued on next page)

1 Motor

Motor	Part Number
Glydea® ULTRA 50 WireFree Zigbee	1246594
Glydea® ULTRA 35 Motor RTS with 10' Plug	1246116
Glydea® ULTRA 35 Motor DCT with 10' Plug	1246115
Glydea® ULTRA 60 Motor RTS with 10' Plug	1246118
Glydea® ULTRA 60 Motor DCT with 10' Plug	1246117
Glydea® ULTRA 35 Wired Motor with 10' Plug	1003153
Glydea® ULTRA 60 Wired Motor with 10' Plug	1003160
Irismo™ 35 (Mini DC) RTS	1003004
Irismo™ 35 (Mini DC) DCT	1003003
Irismo™ 45 WireFree RTS	1002353

2 Width (Inches)

Motorized drapery tracks are custom built according to the specified width. Please note that the finished track width is measured pulley end to pulley end. For bent and curved tracks, please provide the total of all wall measurements. When fabricating your drapery, please add 1.5" to your return.

3 Tandem Y=Yes N=No

Tandem motorized systems utilize two drapery motors. Items needed for tandem systems should be noted in the Special Instructions Section of the order form.




Tandem alternative = 2 one way tracks
Requires Glydea ULTRA DCT or IRISMO 35 DCT motors.

4 Motor Side

L=Left Side R=Right Side
Choose the motor side best suited for your installation.


5 Track Type

A-I See below O=Other
NOTE: Somfy requires a template for all curved tracks. Add an "S" after Track Type for Silent Master Carrier option (e.g., "A-S"). Please see ***Directions for Creating a Template for Drapery Curves*** for necessary information.

A One way	D One way w/Bend	G Center Opening w/2 Bends
	 R = 30 cm max (11.8")	 R = 30 cm max (11.8")
B Center Opening	**E Center Opening w/Bend**	**H One Way w/Continuous Curve**
	 R = 30 cm max (11.8")	 R = 300 cm max (118")
C Asymetrical	**F One way w/2 Bends**	**I Center Opening w/Continuous Curve**
	 R = 30 cm max (11.8")	 R = 300 cm max (118")

6 Track Color - White, Bronze, or Black

7 Stack

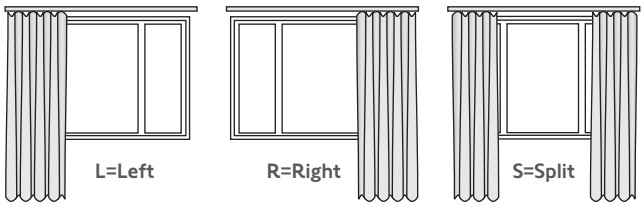

8 If Bent: # of Bends

1=1 Bend, 2=2 Bends, 3=3 Bends, etc.
NOTE: Somfy requires exact angle measurements for all bent tracks. Please submit completed and signed ***Bent Drapery Track Measurement Form*** with all bent track orders.

9 Carrier/Runner Type

1=1 Bend, 2=2 Bends, 3=3 Bends, etc.

SPP=Silent Pinch Pleat
(QTY of 3 per foot included)
PP=Pinch Pleat
(QTY of 3 per foot included)
RF80 = RippleFold® 80% fullness
(QTY of 5 per foot spaced every 2 3/8" included)
RF100 = RippleFold® 100% fullness
(QTY of 6 per foot spaced every 2 1/8" included)
RF120 = RippleFold® 120% fullness
(QTY of 7 per foot spaced every 1 7/8" included)

10 Brackets

NOTE: Brackets are not included and must be ordered separately.

Part Numbers	White	Bronze	Black
One Touch Ceiling Bracket (not recommended for curved tracks)	# 1780907	# 1782865	# 9028544
4.5"-6" Wall Mount Bracket	# 1782054	# 9025621	# 9026930
8.75"-10.25" Double Wall Mount Bracket	# 1782053	# 9025622	N/A
Swivel Ceiling Bracket (strongly recommended for curved tracks)	# 1780906	# 1782864	# 9026929

Somfy recommends one (1) bracket by each pulley and one (1) bracket every 24". Additionally, one (1) bracket should be placed on each side of a splice if used.

11 Butt Master

Y=Yes N=No
Only available for RippleFold® center opening systems. Quantity 2 required; please note item #1780953 in ***Special Instructions Section*** of the order form.

12 Splice

X=Special splice instructions
Somfy includes a center splice every 16ft of track. Please indicate in the Special Instructions Section if your requirements differ from Somfy's standard.


© Somfy Systems, Inc. • JUNE 2026

BENT DRAPERY TRACK MEASUREMENT FORM


1. *Choose the design that best fits your room setup.*
2. *Measure the wall and degrees of all angles as in the examples shown below.*
   - *Make sure to provide the return measurement "R" (distance from wall to front of drapery track as shown in red). The bent track measurement form represents wall measurements; therefore, the "R" dimension MUST BE specified for accurate track fabrication. If "R" dimension IS NOT specified, drapery track will be fabricated according to dimensions (A, B, C, D, etc.) provided.*
   - *Return dimensions will not be considered, and measurements will be calculated from center of each bend.*
   - *When fabricating drapery, please add an additional 1.5 inches of drapery fabric to the anticipated return size.*
3. *Provide all measurements by filling out order form and submitting to Somfy.*

NOTE: The following dimensions are shown from top view of the track and show various wall designs.


STYLE 1 MEASUREMENT

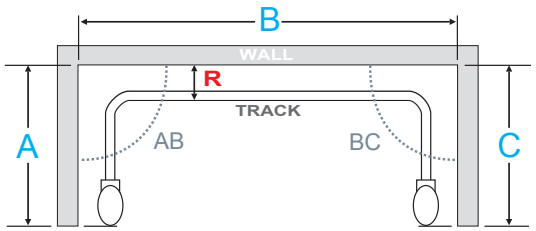


STYLE 2 MEASUREMENT

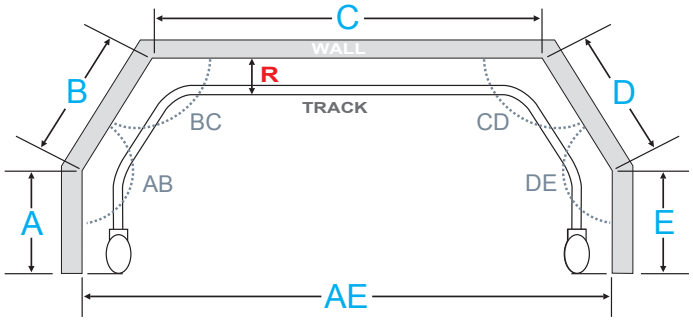


STYLE 3 MEASUREMENT

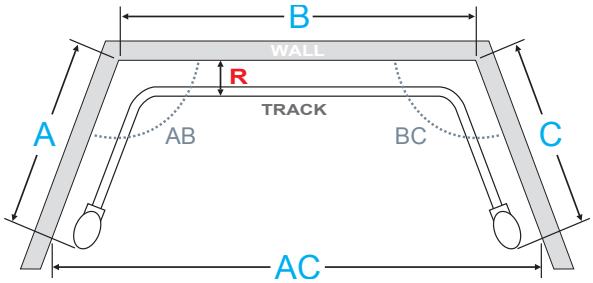

STYLE 4 MEASUREMENT

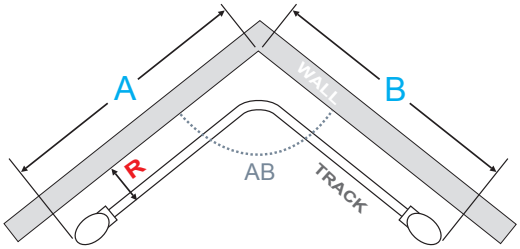

STYLE 5 MEASUREMENT*

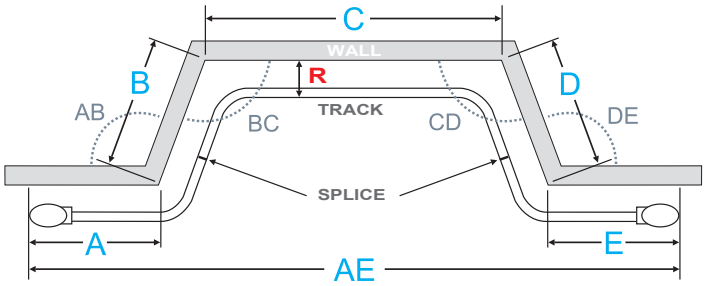

TRACK 1		TRACK 2	
"R" Dimension _____		"R" Dimension _____	
Style ____	Degree of	Style ____	Degree of
A _____	Bend	A _____	Bend
B _____	AB _____	B _____	AB _____
C _____	BC _____	C _____	BC _____
D _____	CD _____	D _____	CD _____
E _____	DE _____	E _____	DE _____
AC _____		AC _____	
AE _____		AE _____	

** Splices are required for this style.*

© Somfy Systems, Inc. • JUNE 2026

DIRECTIONS FOR CREATING A TEMPLATE FOR DRAPERY CURVES

What you need: • Large piece of construction paper • Tape Measure • Marker • Tape

1. Start with a large piece of construction paper that exceeds the depth and length of the curve.
2. Place the paper on the floor or ceiling depending on the orientation of the curve.
3. Secure the paper with tape.
4. Clearly define the stacking side, motor placement, pocket depth and center line of track with the marker.
5. Mark the radius of the curve.

Please call Somfy for specialty curving applications. Depending on your particular application, your project may require special attention.

6. Please provide as much detail as possible, and all templates must include the following:
   - Indicate "room side"
   - Note how the template was created
     - Template created on the floor facing up (See Figure 1) *preferred method*
     - Template created on the ceiling facing down (See Figure 2)
   - Purchase order number
   - Customer name
   - Company name and account number
7. Note the distance from the wall or the window to the center of the track. **NOTE: be sure to clear all possible obstructions such as handles, sills etc.**
8. Identify the following measurement points:
   - Placement of motor
   - Exact stopping point of track on template
   - Total measurement of curve (See Figure 4-"C")

FIGURE 1: TEMPLATE ON THE FLOOR FACING UP

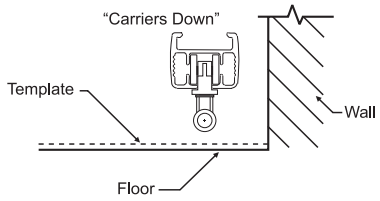


FIGURE 2: TEMPLATE ON CEILING FACING DOWN

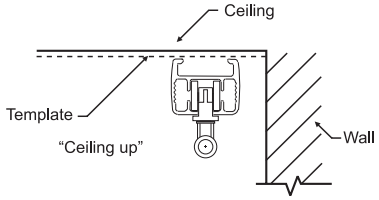


FIGURE 3: CRITICAL DIMENSIONS OF A CURVED TRACK


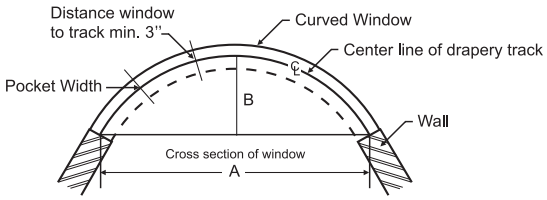


FIGURE 4: TOTAL MEASUREMENT OF CURVE

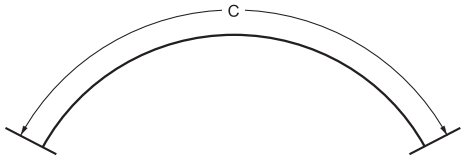

Template Submission Instructions

- Attach a copy of the purchase order to the template.
- Roll up template and place in a mailing tube.

DO NOT FOLD TEMPLATE

NOTE: When mailing, be sure to:

- Get a tracking number
- Include your return address
- Include your purchase order number on the label

Mail to:

Somfy Systems, Inc.
121 Herrod Blvd.
Dayton, NJ 08810
Attn: Drapery Department

Acceptable materials for making templates:

• Kraft Paper • Butcher Paper • Construction Paper

Somfy will not accept template made from the following materials:

• Newspaper • Plastic • Wax Paper • Fabric • Tissue Paper
• Roofing Paper • Existing Arch Shades • Wrapping Paper

NOTE: If the material used to make a template stretches, tears easily, will not lay flat, or will mark the fabric - IT WILL NOT BE USED.

© Somfy Systems, Inc. • JUNE 2026