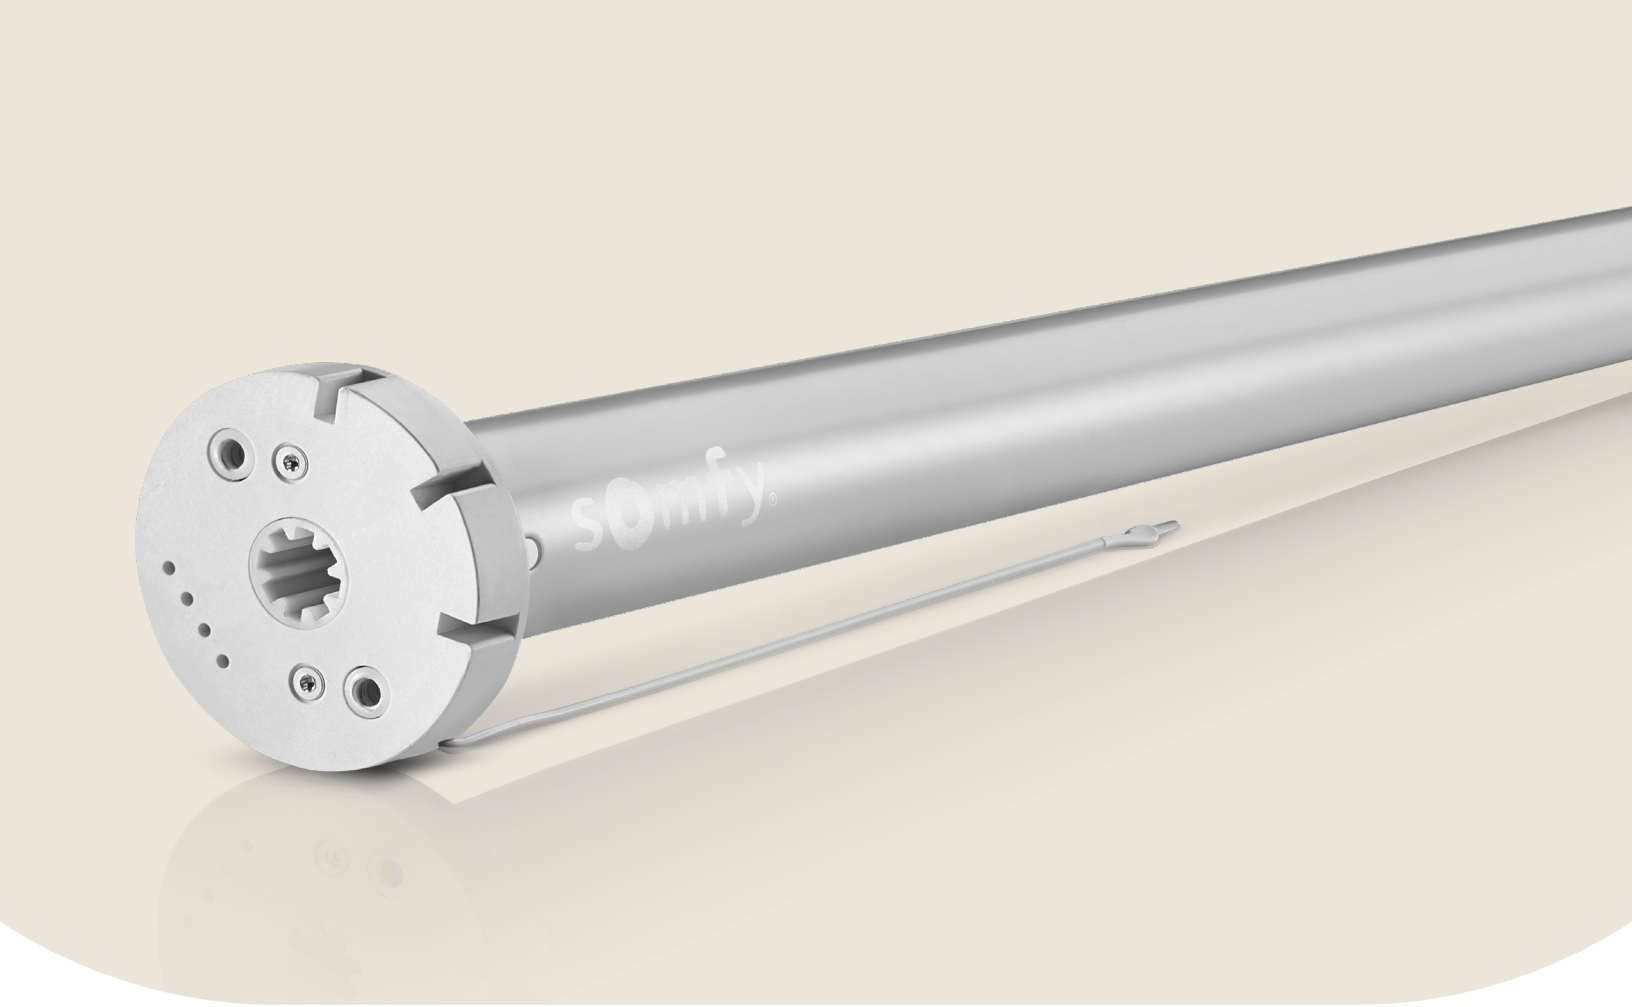


WireFree Databook

zigbee

RTS
Radio Technology Somfy®

somfy

Pro Tools and Support

The TaHoma® pro app provides hassle-free manufacturing and installation. A revolution in building and programming smart window coverings.

Download on the App Store | GET IT ON Google Play

Serv-e-Go® is a web application for dealers to elevate after-sales support by remotely diagnosing errors and providing real-time support to end users enjoying Zigbee installations.

Help me by Somfy is an app that provides step-by-step guidance when installing Somfy products - no need for paper manuals, regardless of the project.

Reduce the risk of errors, stop wasting time, and enjoy successful motorization installations.

Download on the App Store | GET IT ON Google Play

Somfy's e-learning platform provides access to on-demand training, as well as live training events.

With **Somfy U**, you and your employees can learn about Somfy product and technologies. Plus, be eligible to earn rewards for learning about Somfy solutions upon completion of your first class.

The Somfy Expert Program is designed with a single goal in mind: to help your business thrive.

Our program provides specialized tools, direct support, and on-demand training featuring a growing range of smart home solutions. The Somfy Expert program is designed to help grow your business by creating a smarter, more efficient home for your customers.

A committed customer support team of Somfy motor and control specialists available for assistance:

General Customer Service
877-210-5327 • customerservice_us@somfy.com

Somfy Corporate Headquarters
800-22-SOMFY (76639)

Standard Purchase Order
ordering_us@somfy.com

Rush Purchase Order
expeditedshippingorders_us@somfy.com

Accounting Inquiries
accountsreceivable@somfy.com

Technical Support
877-233-0019
technicalsupport_us@somfy.com

Warranty Claim Requests
us_return@somfy.com

5 YEARS WARRANTY

Somfy understands that training and support are critical to success. Somfy's Expert Program has been developed to provide a platform for those who want to enhance their expertise of motorization and control solutions. Visit **www.somfypro.com** to learn more and sign up for training.

Table of Contents

Introduction 3

Motor Specifications and Hardware Systems

Roll Up 24 WireFree™ RTS (Li-ion) 4
- 24mm WireFree Motor Crown, Drive, and Bracket Adaptors 5

Roll Up 28 WireFree™ RTS V2 (Li-ion) 6
Roll Up 28 WireFree™ RTS V2 (External Battery) 7
Sonesse® 28 WireFree Zigbee (Li-ion) 8
Sonesse® 28 WireFree Zigbee (External Battery) 9
Sonesse® 28 WireFree RTS (Li-ion) 10
Sonesse® 28 WireFree RTS (External Battery) 11
28mm WireFree Hardware Systems
- RollEase® R-Series & ZMC XR-Series 12
- RollEase® Skyline & ZMC XL-Series 13
- Louvolite® System 40 & ZMC RS-Series 14

28mm WireFree Motor Crown and Drive Adaptors 15
Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) 17
Sonesse® ULTRA 30 WireFree RTS (Li-ion) 18
30mm WireFree Hardware Systems
- Acmeda® 19
- Somfy Decorator Type 20
- RollEase® Standard & ZMC XR-Series 21
- RollEase® Skyline & ZMC XR-Series 22
- Louvolite System 40 and ZMC RS-Series 23
- Somfy CTS 40 24

30mm WireFree Motor Crown and Drive Adaptors 25
Sonesse® 40 Zigbee (Li-ion) (USB-C) 26
Sonesse® 40 WireFree RTS (Li-ion) 27
40mm WireFree Hardware Systems
- Acmeda® System 28
- Somfy Decorator Type 30
- RollEase® Skyline 32
- Somfy CTS 40 33

Bracket, Fascia, and Cassette Solutions
- RollEase® 34
- ZMC® 34

40mm WireFree Mechanical Accessories 35
Top-down Bottom-up 45 WireFree™ Zigbee 38
Top-down Bottom-up 25 WireFree™ Zigbee 39
- Top-down Bottom-up (TDBU) Hardware Systems and Accessories 40

Cord Lift WireFree™ TLV25 Zigbee (External Battery) 41
Cord Lift WireFree™ TLW25 Zigbee (External Battery) 42
Cord Lift WireFree™ TLW25 RTS (External Battery) 43
- TLV25 & TLW25 Hardware Systems and Accessories 44

Cord Lift WireFree™ CL32 RTS 45
- CL32 RTS Hardware Systems and Accessories 46

Tilt 50 WireFree™ Through-Shaft Zigbee (External Battery) 47
Tilt Only 50 WireFree™ RTS Through Shaft 48
- Tilt 50 Hardware Systems and Accessories 49

WireFree Controls

Zigbee® Technology 50
Radio Technology Somfy® (RTS) 50
Dry Contact 51

WireFree USB-C Power Accessories

Solar Panel and Hardware Accessories 52
Power Accessories 52

WireFree Power Accessories

Solar Panel and Hardware Accessories 53
Power Accessories 53
Power Hardware Accessories 54

Decoflex & Smoove® Button Engraving Forms

Decoflex Wirefree™ Surface 5 Channel 55
Decoflex Keypad 56
Smoove® Wireless Wall Switches 57

RollEase ® is a registered trademark of RollEase®, Inc. - Stamford, CT.
Louvolite® is a registered trademark of Louver-lite Limited.
Hunter Douglas® is a registered trademark of Hunter Douglas Industries Switzerland GMBH Corporation- Luzern, Switzerland.
Comfortex® is a registered trademark of Comfortex Corporation - New York, NY.
RadioRA® 2, HomeWorks® QS, GRAFIK Eye® QS, and Quantum® are a registered trademark of Lutron Electronics Inc.
Energizer® is a registered trademark of Energizer Battery Company, Inc.
Zigbee® is a registered trademark of Connectivity Standards Alliance.
Amazon, Alexa, and all related logos are the trademarks of Amazon.com, Inc. or its affiliates.
All brands, products and trademarks are the property of their respective owners.

Conveniently WireFree

This document is a presentation of the motors, accessories, and specifications related to the wirefree motor range. It provides the technical information needed to order, fabricate, and sell battery-powered motors.

Somfy offers an innovative and simple line of completely battery-powered wirefree motors. These motors install in minutes and provide a perfect solution for hard-to-reach window coverings and offer solutions in areas where access to wiring may be a challenge. This allows users to create the best living environment with optimal natural light levels at the press of a button without the need for an electrician. The wirefree motors can be controlled using hand-held remotes, an app on a smart device, the sound of your voice, wireless wall switches, table top controls, sensors, timers, and third-party automation systems.

Zigbee®: A comfort-driven ecosystem of smart shading products featuring real-time, bi-directional communication.


Radio Technology Somfy® (RTS): wireless radio control of motorized window coverings via the RTS family of controls.



Solar/Roller Shades



Sheer Horizontal Shades

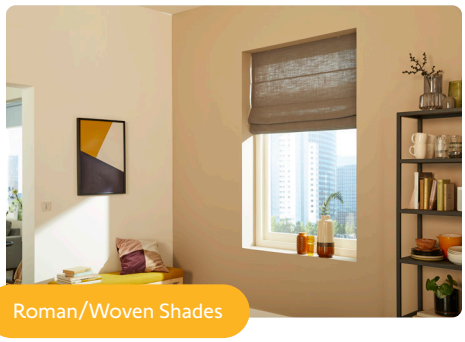

Roman/Woven Shades



Pleated/Cellular Shades



Horizontal Blinds



Layered Shades

5 YEARS WARRANTY

As with all Somfy products, the WireFree motors are backed by a 5 year warranty.

Roll Up 24 WireFree™ RTS (Li-ion)

Item #: 1240278

5 YEARS WARRANTY

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications




Roller Shades | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

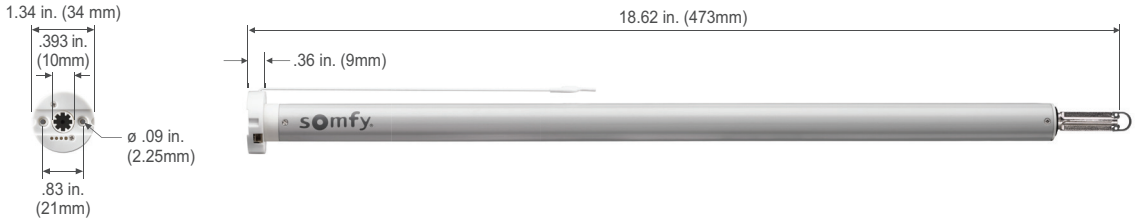

Specifications

Nominal Torque	0.55 Nm
Nominal Speed	38 rpm
Adjustable Speed	20-38 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 800mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge twice per year*
Charging Time	<4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day





Certifications

CE

24mm WireFree Motor

Crown, Drive, and Bracket Adaptors

Crowns & Drives for 24mm Motors

Tube Profile (not to scale)	Set	Tube Profile (not to scale)	Set
 Louvolite® 32mm	 Crown & Drive for Louvolite 32 #9025710	 Rollease 1.25"	 Crown & Drive for Rollease 1.25" (32mm) #9025711
 Rollease 1.125"	 Crown & Drive for Rollease 1.125" (28mm) #9025712	 28mm Round	 Crown & Drive for 28mm Tube #9025744
 HD ø 31mm	 Crown & Drive for HD 31mm Tube #9025745		

Motor Plates for 24mm Motors

 Motor Plate (Starhole) #9025713	 Motor Plate (with Ears) #9025735	 Motor Plate for Louvolite 32 #9025736
 Motor Plate for Skyline #9025737	 Motor Plate Pin (6mm x 3mm) #9025738	

Roll Up 28 WireFree™ RTS V2 (Li-ion)

Item #: 1241150

5 YEARS WARRANTY

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

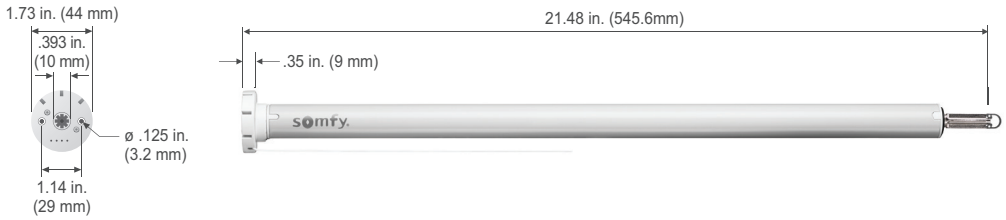

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

CE

Roll Up 28 WireFree™ RTS V2 (External Battery)

Item #: 1241162

5 YEARS WARRANTY

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

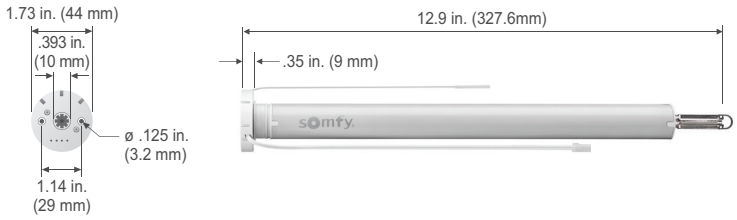

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 to 28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (External Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

CE

Sonesse® 28 WireFree Zigbee (Li-ion)

Item #: 1241755



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	15 cm wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

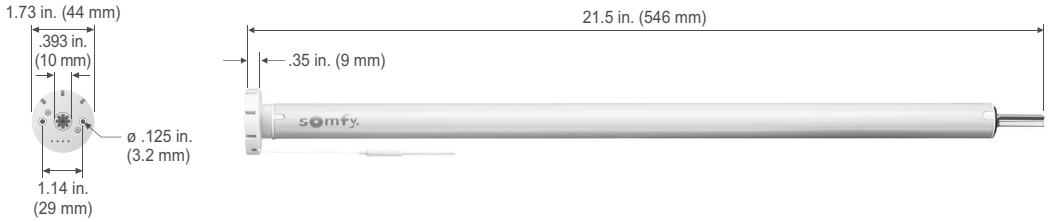

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 1 rpm
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 2600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	< 4 to 5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

Sonesse® 28 WireFree Zigbee (External Battery)

Item #: 1241754



Applications




Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades

* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	15 cm wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

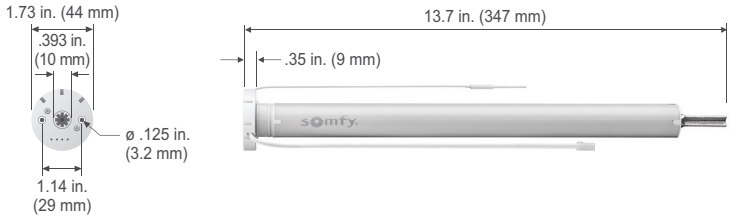

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 to 28 by increment of 1 rpm
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 2600mAh (External Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	< 4 to 5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

Sonesse® 28 WireFree RTS (Li-ion)

Item #: 1003297

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

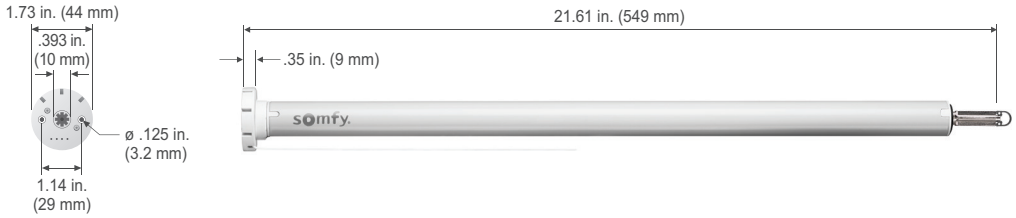

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

CE

Sonesse® 28 WireFree RTS (External Battery)

Item #: 1241230

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

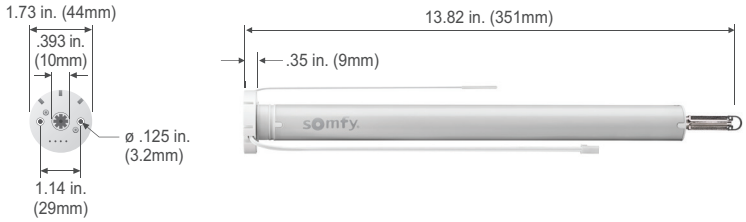

Specifications

Nominal Torque	1.1 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 to 28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (External Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day


Certifications

CE


28mm WireFree Hardware Systems

RollEase® R-Series & ZMC XR-Series

Standard Bracket Components

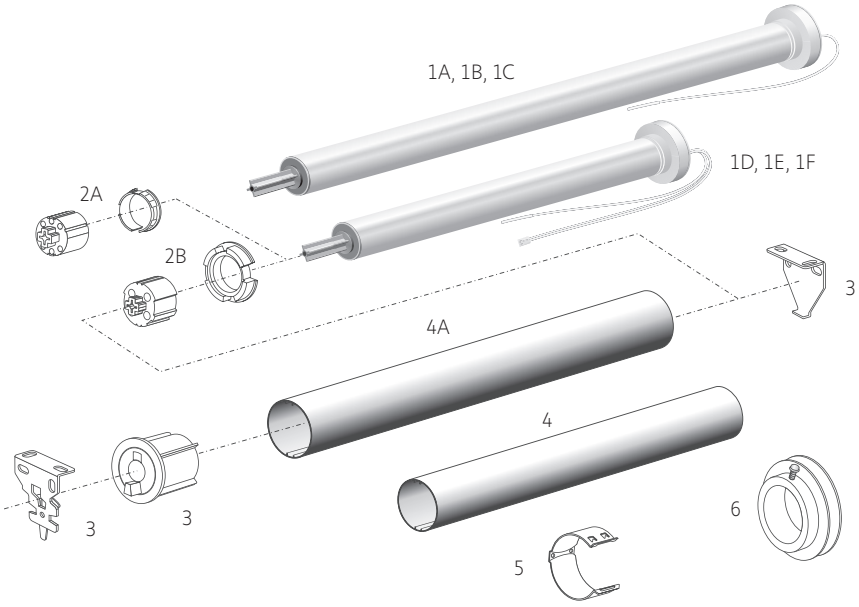

Dimensions and Light Gap Specifications

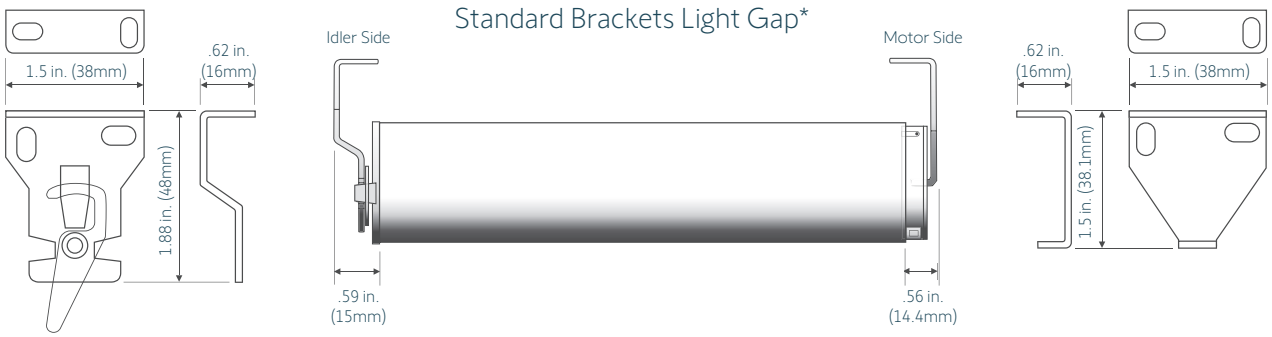

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B 1C	Sonesse® 28 WireFree Zigbee (Li-ion) Sonesse® 28 WireFree RTS (Li-ion) Roll Up 28 WireFree™ RTS V2 (Li-ion)	1241755 1003297 1241150
1D 1E 1F	Sonesse® 28 WireFree Zigbee (External Battery) Sonesse® 28 WireFree RTS (External Battery) Roll Up 28 WireFree™ RTS V2 (External Battery)	1241754 1241230 1241162
2A	Crown and Drive (for Rollease® 1.25" Tube & ZMC 1.25" Z-Tube)	9025815
2B	Crown and Drive (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9020674
3	Rollease® 1.5" Projection Bracket Kit R8 Series & ZMC 1.5" Projection XR-Series Brackets	Contact Somfy/ZMC
4	Rollease® 1.5" Tube ZMC 1.5" Z-Tube	9017913 Contact ZMC
4A	Rollease® 1.25" Tube & ZMC 1.25" Z-Tube	Contact Somfy/ZMC
5	Cord Clips (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9012200
6	Take-Up Reel (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	1780786


28mm WireFree Hardware Systems

RollEase® Skyline & ZMC XL-Series

Standard Bracket Components

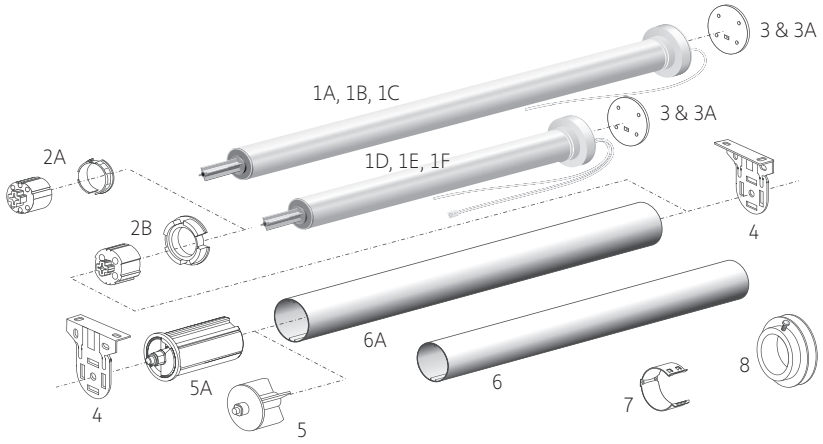

Dimensions and Light Gap Specifications

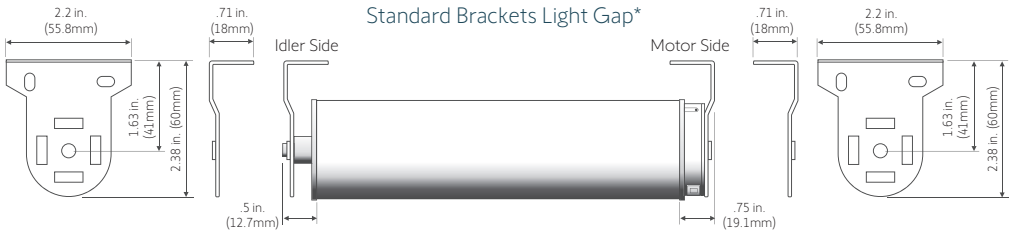

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B 1C	Sonesse® 28 WireFree Zigbee (Li-ion) Sonesse® 28 WireFree RTS (Li-ion) Roll Up 28 WireFree™ RTS V2 (Li-ion)	1241755 1003297 1241150
1D 1E 1F	Sonesse® 28 WireFree Zigbee (External Battery) Sonesse® 28 WireFree RTS (External Battery) Roll Up 28 WireFree™ RTS V2 (External Battery)	1241754 1241230 1241162
2A	Crown and Drive (for Rollease® 1.25" Tube & ZMC 1.25" Z-Tube)	9025815
2B	Crown and Drive (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9020674
3	Motor Adaptor Plate for Rollease® Skyline and ZMC XL Series Brackets W/ Screws	9016378
3A	M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 28/30 WireFree & Roll Up WireFree only)	9014066
4	Skyline Series Brackets 1.5" Projection (Rollease®) (2 Required)	9017910
4	XL-Series Brackets 1.5" Projection (ZMC) (1 Pair required)	Contact ZMC
5	Skyline Series Idler End Plug (for Rollease® 1.25" Tube)	Contact ZMC
5	XL-Series Idle End (for ZMC 1.25" Z-Tube)	Contact ZMC
5A	Skyline Series Heavy Duty Idler End Plug (for Rollease® 1.5" Tube)	9017912
5A	XL-Series Idle End (for ZMC 1.5" Z-Tube)	Contact ZMC
6	Rollease® Style 1.5" Tube ZMC 1.5" Z-Tube	9017913 Contact ZMC
6A	Rollease® Style 1.25" Tube & ZMC 1.25" Z-Tube	Contact ZMC
7	Cord Clips (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9012200
8	Take-Up Reel (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	1780786


28mm WireFree Hardware Systems

Louvolite® System 40 & ZMC RS-Series

Standard Bracket Components

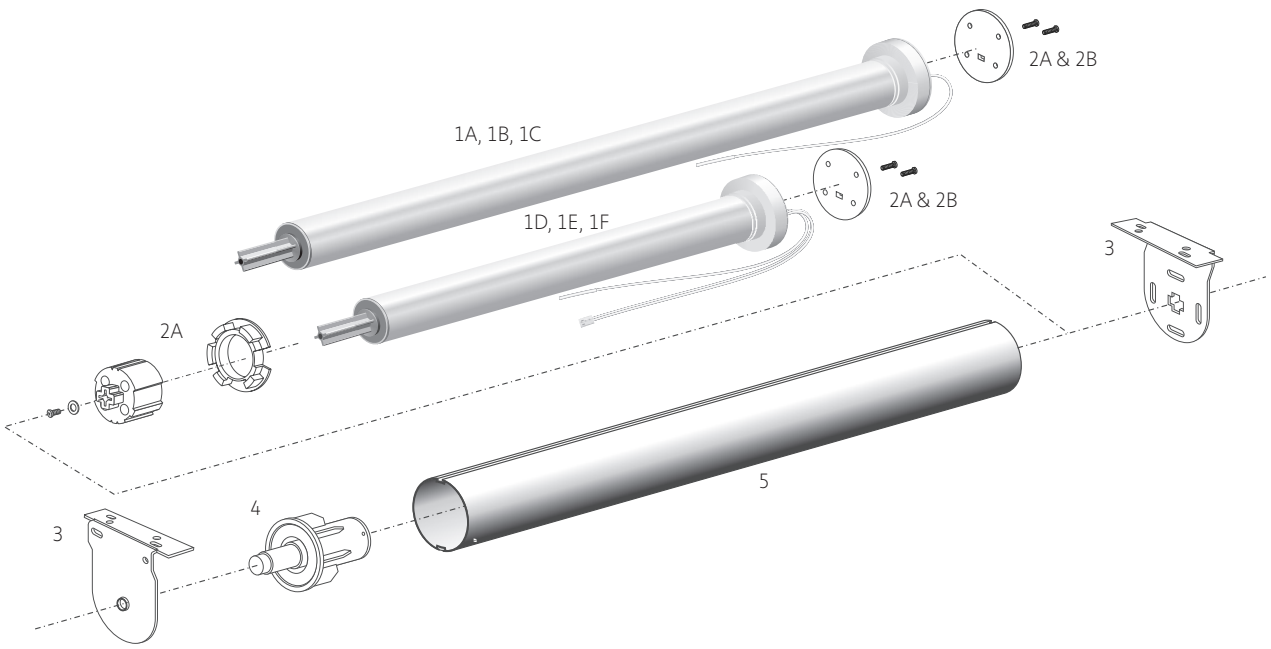

Dimensions and Light Gap Specifications

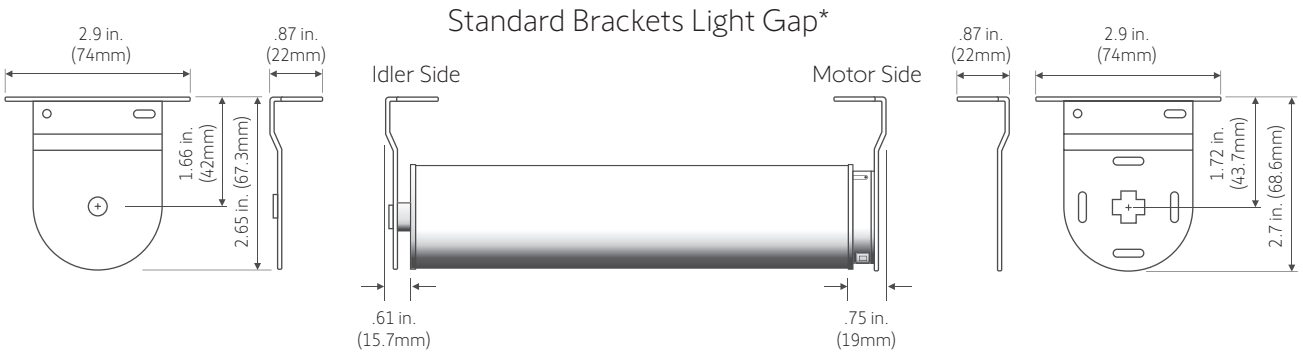

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.







Product Chart

Image	Description	Catalog Number
1A 1B 1C	Sonesse® 28 WireFree Zigbee (Li-ion) Sonesse® 28 WireFree RTS (Li-ion) Roll Up 28 WireFree™ RTS V2 (Li-ion)	1241755 1003297 1241150
1D 1E 1F	Sonesse® 28 WireFree Zigbee (External Battery) Sonesse® 28 WireFree RTS (External Battery) Roll Up 28 WireFree™ RTS V2 (External Battery)	1241754 1241230 1241162
2A	Crown and Drive (for Louvolite 40mm Tube & ZMC 1.5" RS-Tube includes Motor Adaptor Plate with Screws)	9020675
2B	M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 28/30 WireFree & Roll Up WireFree only)	9014066
3	Motor & Idler Bracket Kit (for Louvolite® Style System 40 & ZMC RS-Series)	N/A
4	Collapsible End Plug (for Louvolite® Style System 40 & ZMC RS-Series)	9013716
5	Louvolite® Style 40mm Tube & ZMC 1.5" RS-Tube	Contact ZMC

28mm WireFree Motor

Crown and Drive Adaptors

Crowns & Drives for 28mm Motors










Tube Profile (not to scale)	Set
	
ø 1.25 in. / 32mm RollEase®	#9025815
	
ø 1.625 in. / 41.28mm Louvolite® System 40	#9020675
	
Louvolite® 45mm	#9025815
	
ø 1.5 in. / 38mm RollEase®	#9020674
	
ø 1.05 in. / 28mm Round Tube (Standard)	#9026644

28mm WireFree Motor

Crown and Drive Adaptors

Crowns & Drives

Specialty Applications - Crown and drives may not be suitable for all applications.
NOTE: Please confirm manufacturers current tube profile corresponds to illustrations shown.

Tube Profile (not to scale)	Set	Tube Profile (not to scale)	Set
 Silouette® Hunter Douglas	 Silhouette® (post March '04) #9025816	 Vignette® Hunter Douglas	 Vignette® #9025813
 Shangri-La / Vienna Comfortex® / Turnils *New Style*	 Shangri-La® / Vienna Tube #9026395	 HD ø 31mm	 #9025812
 HD ø 37mm	 #9020699	 Acmeda 45	 #9021018*
 Acmeda 45 HVY DTY	 #9021036*		 Sonesse® 30 WireFree to 400 Series Adaptor Kit #9020676*
 Rollease/ZMC 2"	 Crown & Drive for Rollease/ZMC 2" Profiled Tube #9021017	 Silouette® Hunter Douglas	 Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette #9016953* *(Use with #9020676)*

*NOTE: Not compatible with quick lock drive motors.

Sonesse® ULTRA 30 WireFree Zigbee (Li-ion)

Item #: 1241752



Applications




Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades

* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	15 cm wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

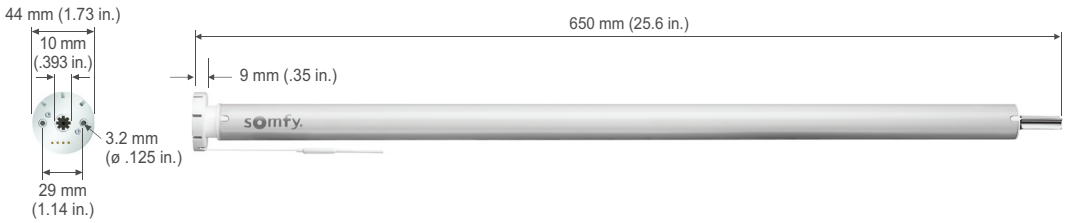

Specifications

Nominal Torque	2 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 1 rpm
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 2600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	< 4 to 5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

Sonesse® ULTRA 30 WireFree RTS (Li-ion)

Item #: 1003310

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

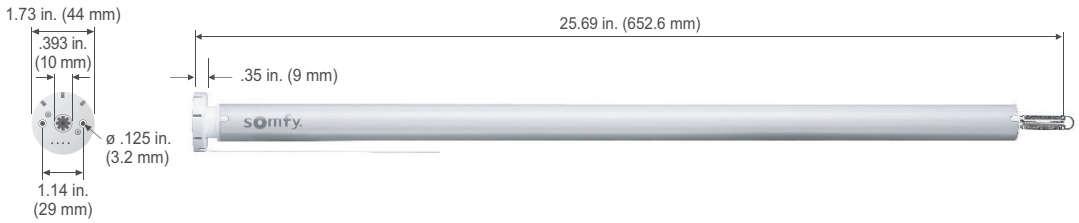

Specifications

Nominal Torque	2 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day


Certifications

CE NOM EAC


30mm WireFree Hardware Systems

Acmeda®

Standard Bracket Components

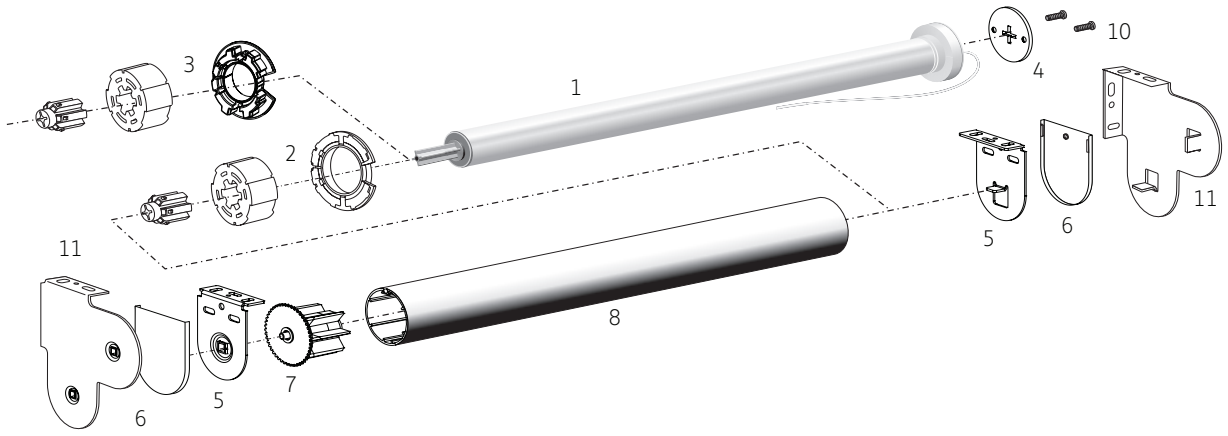

Dimensions and Light Gap Specifications

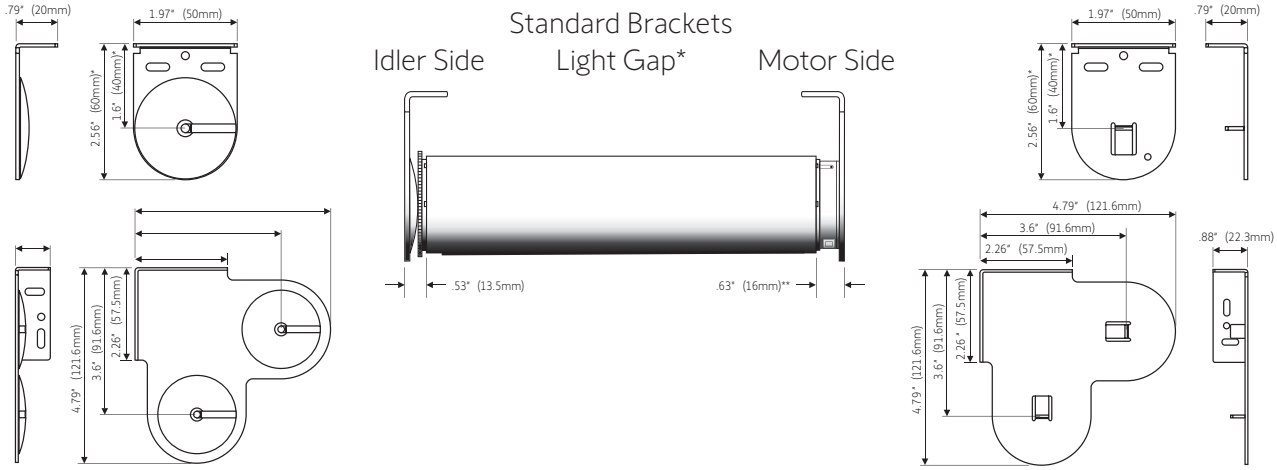

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.
Includes motor bracket adapter plate #9013789


Product Chart

Image	Description	Catalog Number
1A 1B	Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1241752 1003310
2	Crown & Drive 45mm Tube (Acmeda Type) (does not require # 9020676)	9021018
3	Heavy Duty Crown & Drive 45mm (Acmeda Type) (does not require # 9020676)	9021036
4	Motor Bracket Adaptor Plate (Acmeda Type)	9013789
5	Motor & Idler Bracket Kit 40p (Acmeda Type)	9013778
6	Plastic Bracket Cover 40p Kit (Acmeda Type)	9013780
7	Idler End Plug 45mm Tube (Acmeda Type)	9013774
8	45m Aluminum Tube (16 ft. max length)	1780688
9	M 3.5 x 9mm Screws	9014066
10	Dual Motor & Idler Bracket Kit 122mm x 122mm	9013782

30mm WireFree Hardware Systems


Somfy Decorator Type

Standard Bracket Components

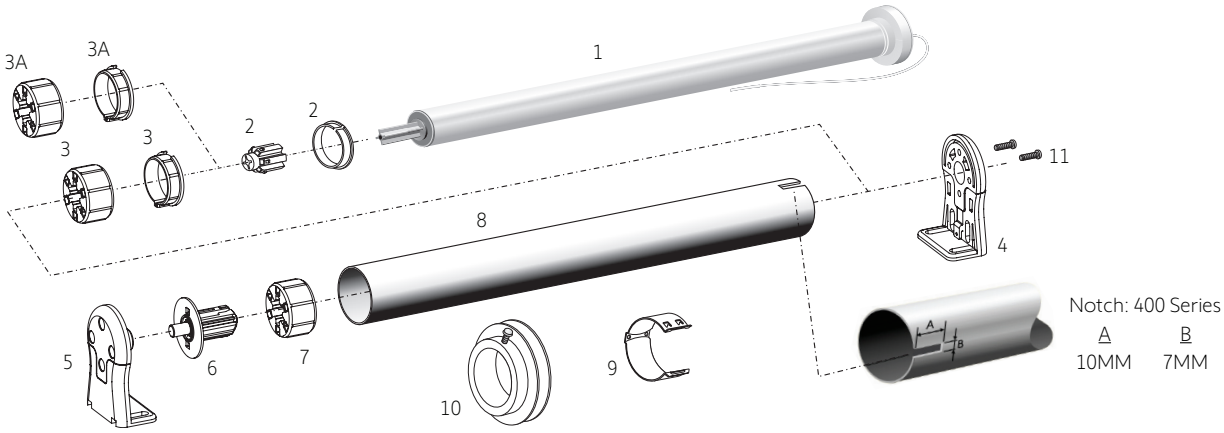

Dimensions and Light Gap Specifications



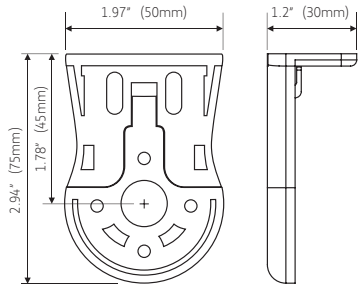

Motor/Idler

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B	Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1241752 1003310
2	Sonesse® 30 WireFree to LS40 Adaptor Kit (required part for conversion)	9020676
3	Crown and Drive (Somfy 40mm x 1.5mm Round Tube)	9012224
3A	Crown and Rubberized Drive (Somfy 40mm x 1.5mm Round Tube)	9016654
4	Motor Bracket (Decorator Type)	9500683
5	Idler End Bracket (Decorator Type)	9500685
6	Idler End Plug (Decorator Type)	9500688
7	40mm Round Drive (for use with Idler End Plug 9500688)	9147544
8	Somfy 40mm Round Tube (20ft. max length)	1781153
9	40mm Fabric/Cord Clip for Roman Shade Applications	9012200
10	Cord Take-Up Reel (40mm Tube)	1781152
11	M3.5 x 9MM Screws (Must be ordered separately when used with Sonesse® 30 Motor Range.)	9014066


30mm WireFree Hardware Systems

RollEase® Standard & ZMC XR-Series

Standard Bracket Components

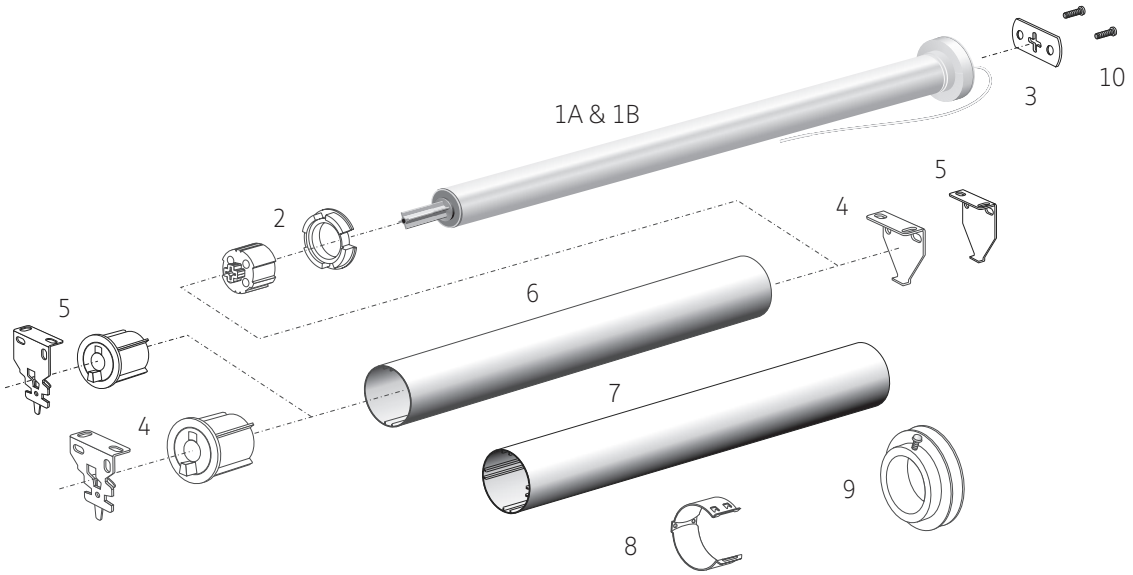

Dimensions and Light Gap Specifications

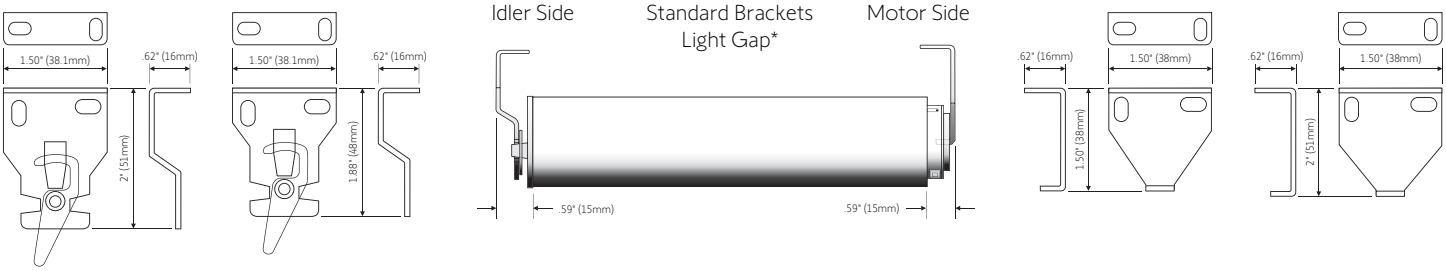

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B	Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1241752 1003310
2	Crown and Drive for Rollease® 1.5" Tube	9020674
3	R8 Adaptor Plate	9012258
4	1.5" Projection Bracket Kit R8 Series & ZMC 1.5" Projection Xr-Series Brackets	Contact ZMC
5	2" Projection Bracket Kit R8 Series & ZMC 2" Projection Xr-Series Brackets	Contact ZMC
6	Rollease® 1.5" Tube	9017913
7	ZMC 1.5" Z-Tube	Contact ZMC
8	40mm Fabric/Cord Clip for Roman Shade Applications	9012200
9	Take-Up Reel (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	1780786
10	M3.5 x 9mm Screws	9014066


30mm WireFree Hardware Systems

RollEase® Skyline & ZMC XR-Series

Standard Bracket Components

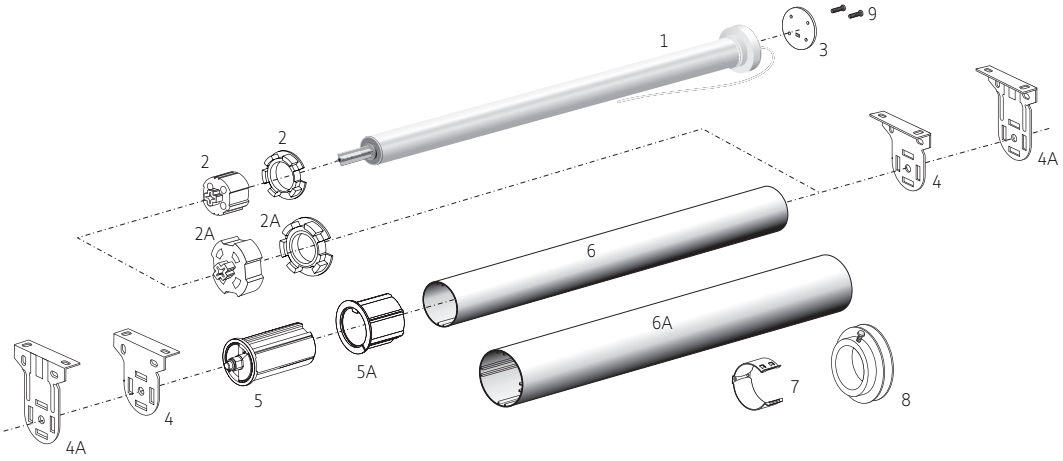

Dimensions and Light Gap Specifications

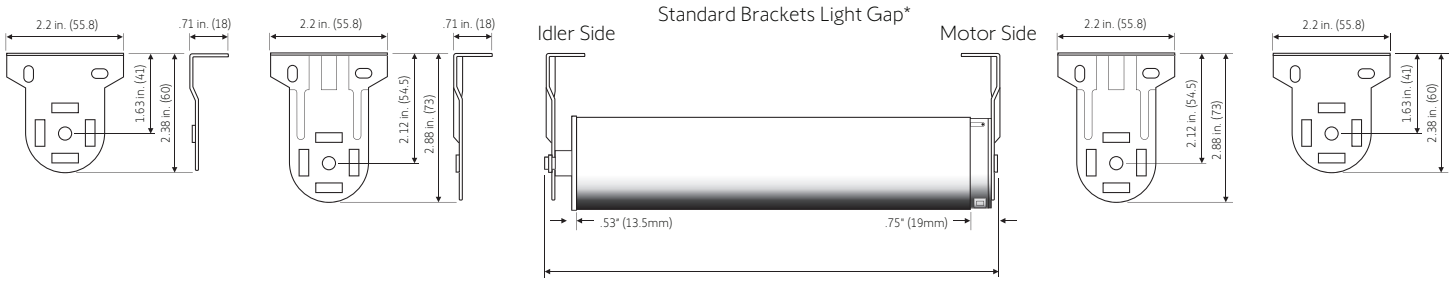

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B	Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1241752 1003310
2	Crown and Drive (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9020674
2A	Crown and Drive (for Rollease® 2" Tube & ZMC 2" Z-Tube)	9021017
3	Motor Adaptor Plate for Rollease® Skyline Brackets W/Screws & ZMC XL Series Bracket	9016378
4	Skyline Series Brackets 1.5" Projection (Rollease®) (2 required)	9017910
4A	Skyline series Brackets 2" Projection (2 required)	9016325
5	Skyline Series Heavy Duty Idler End Plug (for Rollease® 1.5" Tube)	9017912
5A	Idler Adaptor Collar 2" Profile Tube	9016366
6	Rollease® 1.5" Tube	9017913
6	ZMC 1.5" Z-Tube	Contact ZMC
6A	Rollease 2" Profiled Tube	1781798
7	Cord Clips (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	9012200
8	Take-Up Reel (for Rollease® 1.5" Tube & ZMC 1.5" Z-Tube)	1780786
9	M3.5 x 9mm Screws	9014066


30mm WireFree Hardware Systems

Louvolite System 40 and ZMC RS-Series

Standard Bracket Components

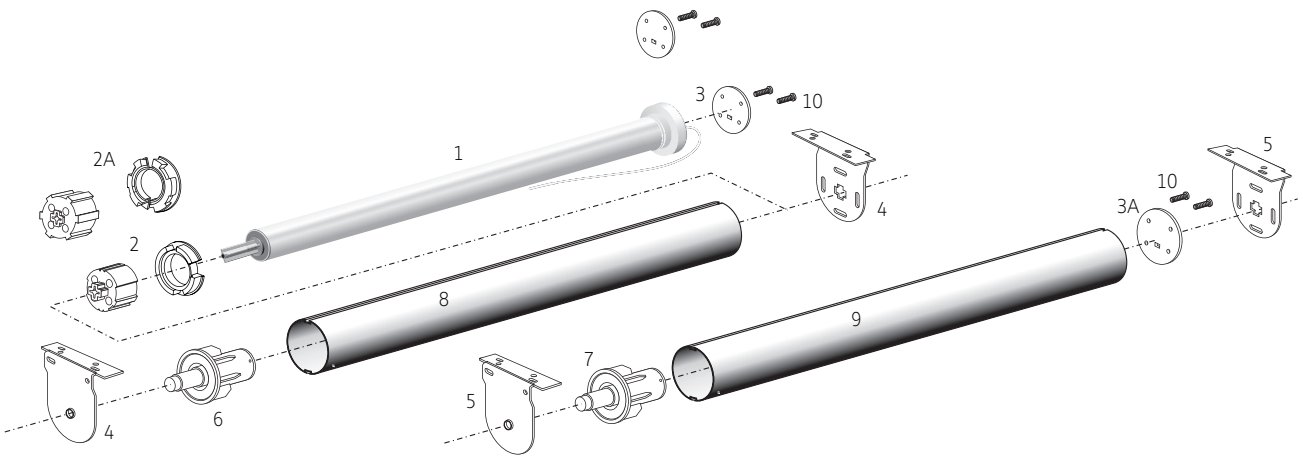

Dimensions and Light Gap Specifications

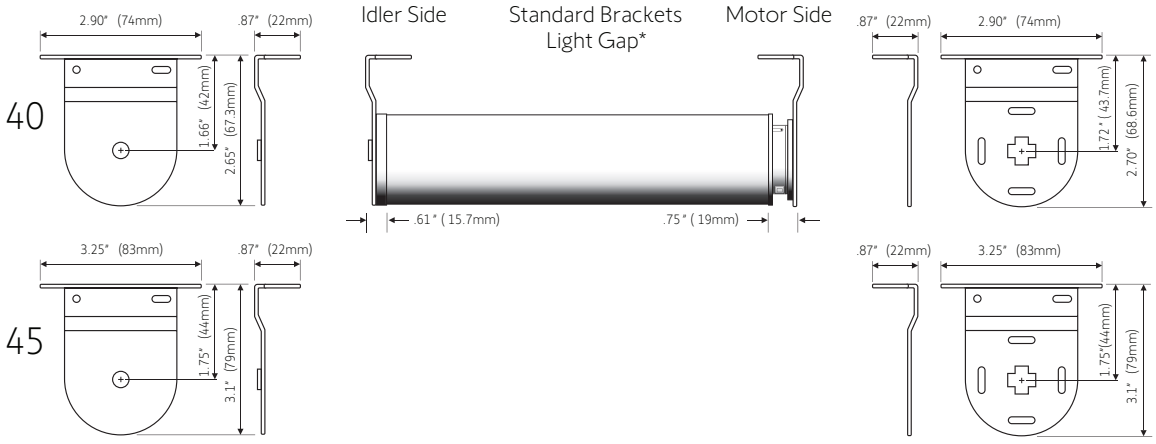

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1A 1B	Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1241752 1003310
2	Crown and Drive (Louvolite 40mm Tube) with Adaptor Plate and Screws	9020675
2A	Crown and Drive (Louvolite 45mm Tube) with Adaptor Plate and Screws	9025811
3	Motor & Idler Bracket Kit (for Louvolite® Style System 40 & ZMC RS-Series)	N/A
4	Motor & Idler Bracket Kit (Louvolite System 45)	9015554
5	Collapsible End Plug (for Louvolite® Style System 40 & ZMC RS-Series)	9013716
6	Collapsible End Plug (Louvolite System 45)	9015555
7	Louvolite® Style 40mm Tube & ZMC 1.5" RS-Tube	Contact ZMC
8	Louvolite 45mm Tube	Contact Louvolite
9	Screws M3.5 x 9mm	9014066

30mm WireFree Hardware Systems

Somfy CTS 40

Cord Take-Up System (CTS)

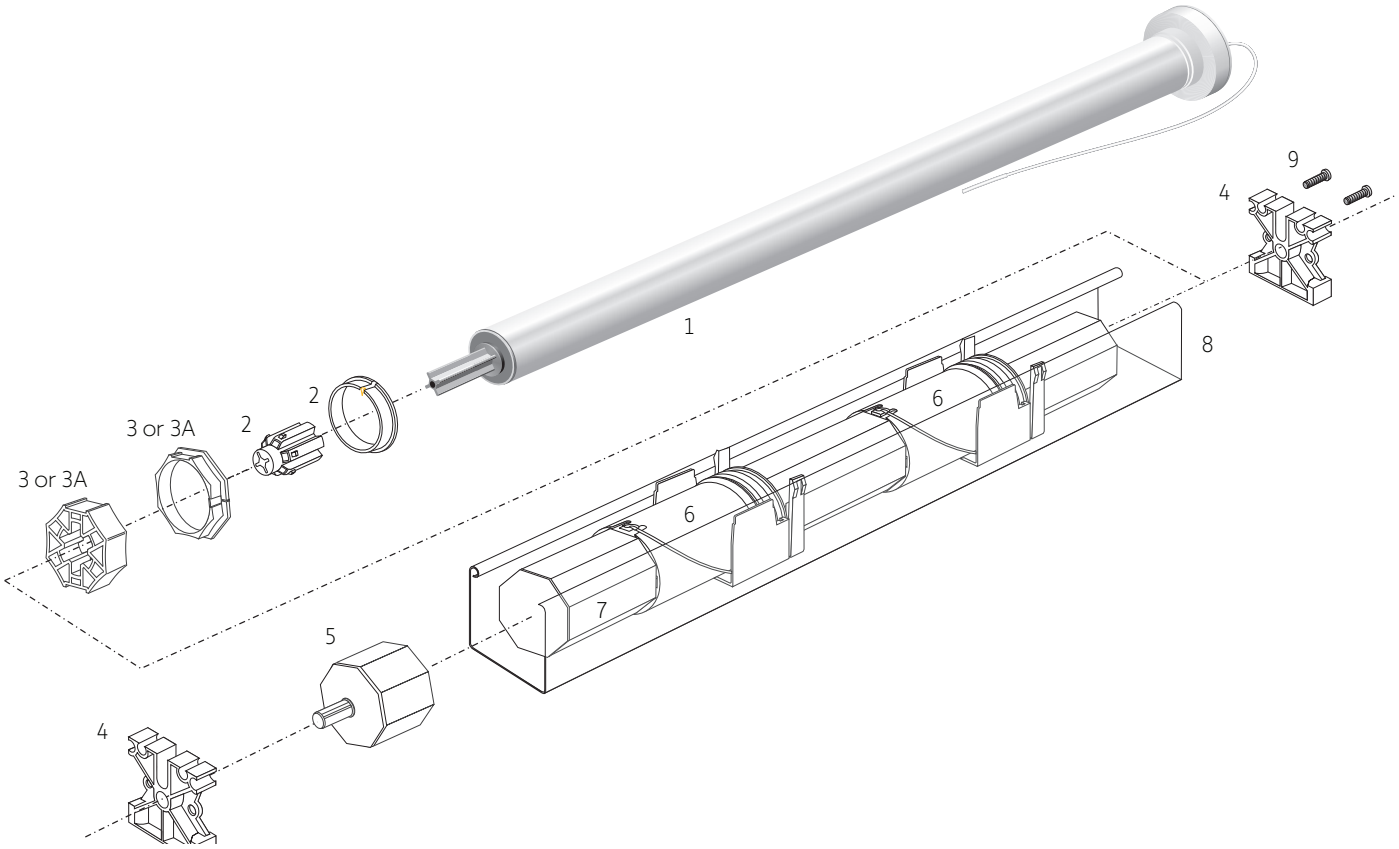










Product Chart

Image	Description	Catalog Number
1	Sonesse® ULTRA 30 WireFree RTS (Li-ion)	1003310
2	Sonesse® 30 WireFree to LS40 Adaptor with Screw & Washer	9020676
3	Crown and Drive Kit 40mm Octagonal Tube	9012225
3A	Rubberized Crown and Drive Kit 40mm Octagonal Tube	9016655
4	Motor/Idler Bracket (for 57mm x 51mm Headrail)	9500736
5	Idler End Plug for 40mm Octagonal Tube	9012274
6	CTS 40 (for 57mm x 41mm Headrail)	1781118
7	Somfy 40mm Octagonal Tube (20ft. Max Length)	1781154
8	57mm x 51mm (2" x 2 1/4") Gutter Rail Or Similar	Contact manufacturer
9	M3.5 x 9mm Screws	9014066
10	Rollease® Double Bracket	9016616
11	Rollease® Double Bracket Covers	9017267

30mm WireFree Motor

Crown and Drive Adaptors

Crowns & Drives

Tube Profile (not to scale)	Set	Tube Profile (not to scale)	Set
 Rollease 1.5"	 Crown and Drive Set for RollEase® 1.5"/38mm Tube #9020674	 ø 1.625 in. / 41.28mm Louvolite® System 40	 Sonesse® 30 Crown and Drive (for Louvolite 40mm tube) #9020675
 Acmeda 45 HVY DTY	 Acmeda 45 Heavy Duty Crown and Drive #9021036*	 HD ø 37mm	 Sonesse® 30 Crown and Drive (for HD 37mm tube) #9020699
 Acmeda 45	 Acmeda 45 Crown and Drive #9021018*	 2" Profiled Tube	 Crown & Drive for RollEase/ZMC 2" Profiled Tube #9021017
 Silouette® Hunter Douglas	 Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette #9016953*	 ø 1.5 in. / 40mm Round	 400 Series Crown and Drive Set (for Somfy 40mm x 1.5" round tube) #9012224*
 40mm Octagonal Tube	 400 Series Crown and Drive Set (40mm X 0.8mm octagonal tube) #9012225*	 Louvolite® 45mm	 Louvolite 45mm Crown & Drive #9025811
 ø 1.5 in. / 40mm Round	 400 Series Crown and Rubberized Drive* (Somfy 40mm X 1.5mm round tube) #9016654	 40mm Octagonal Tube	 400 Series Crown and Rubberized Drive for 40mm octagonal tube #9016655*

*NOTE: Not compatible with quick lock drive motors.

Sonesse® 40 Zigbee (Li-ion) (USB-C)

Item #: 1245993



Applications



Roller Shades | Roman Shades | Woven Wood | Pleated Shades* | Cellular Shades* | Layered Shades | Sheer Horizontal | Horizontal Blinds


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating	IP 20 (for indoor use only)
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Temperature Charging Range	32°F to 104°F (0°C to 40°C)
Temperature Storage Range	-4°F to 140°F (-20°C to 60°C)

Insulation Class	Class II
Antenna	6.9 in. (17.5cm) wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

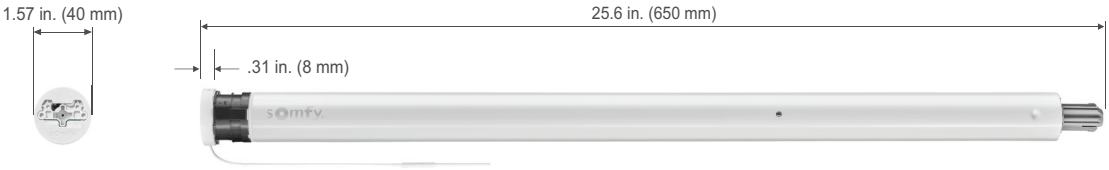

Specifications

Nominal Torque	4 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 to 28 by increment of 1 rpm
Sound Level	40 dB(A)*
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 5000 mAh (built-in lithium-ion)
Battery Autonomy	Only recharge once per year**
Recharging Time	4 hours***
Low Battery Indicator	LED

*Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/end product.
**Based on average shade size and one cycle per day.
***Using Somfy USB-C Li-ion Charger (9028923).

Certifications

Sonesse® 40 WireFree RTS (Li-ion)

Item #: 1240485

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Roller Shades | Cellular Shades* | Pleated Shades* | Roman Shades | Sheer Horizontal | Woven Wood | Layered Shades


* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 30
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	12cm, wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

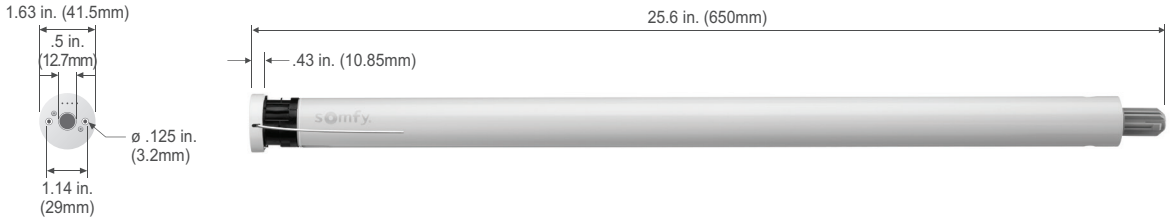

Specifications

Nominal Torque	3 Nm
Nominal Speed	20 rpm
Adjustable Speed	10-28 by increment of 2 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 4600mAh (built-in Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	8 Hrs.
Low Battery Indicator	LED (on motor head)

* Based on one cycle (up and down) per day.


Certifications

CE


40mm WireFree Hardware Systems

Acmeda® System

Standard Bracket Components

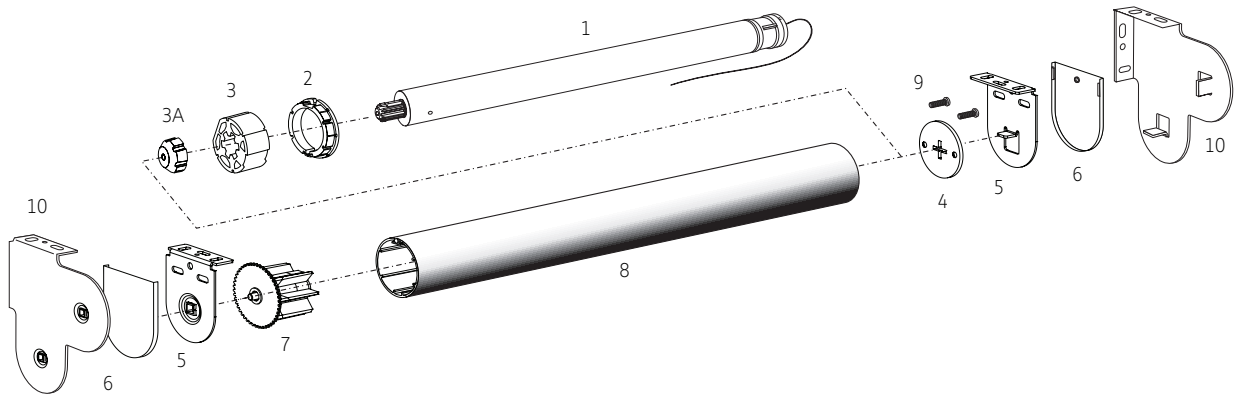

Dimensions and Light Gap Specifications

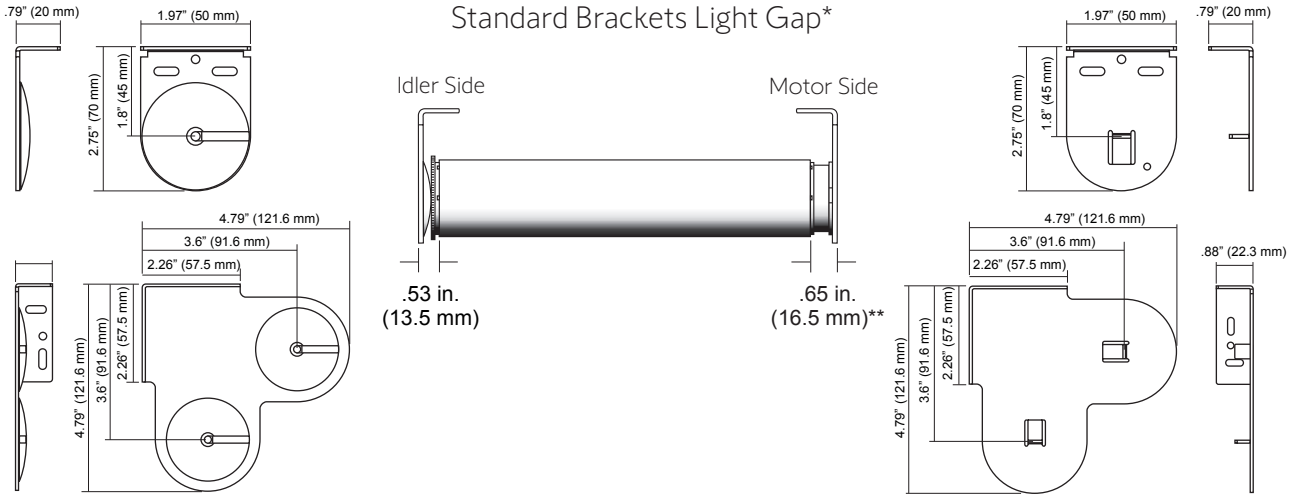

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.
Includes motor bracket adaptor plate #9013789


Product Chart

Image	Description	Catalog Number
1	Motor Sonesse® 40 WireFree RTS (Li-ion)	1240485
2	Crown Adaptor 44mm Tube (Acmeda® Type)	9013791
3	Drive Wheel 44mm (Acmeda® Type)	9013790
3A	400 Series Drive Stop with Screw	9147894
4	Motor Bracket Adaptor Plate (Acmeda® Type)	9013789
5	Motor & Idler Bracket Kit 40p (Acmeda® Type)	9013778
6	Plastic Bracket Cover 40p Kit (Acmeda® Type)	9013780
7	Idler End Plug 44mm Tube (Acmeda® Type)	9013774
8	44 M Aluminum Tube (16 ft. Max Length)	1780688
9	M3.5 x 9mm Screws	9014066
10	Motor Bracket Combo Set 122mm x 122mm	9013782


40mm WireFree Hardware Systems


Acmeda® System

Standard Bracket Components

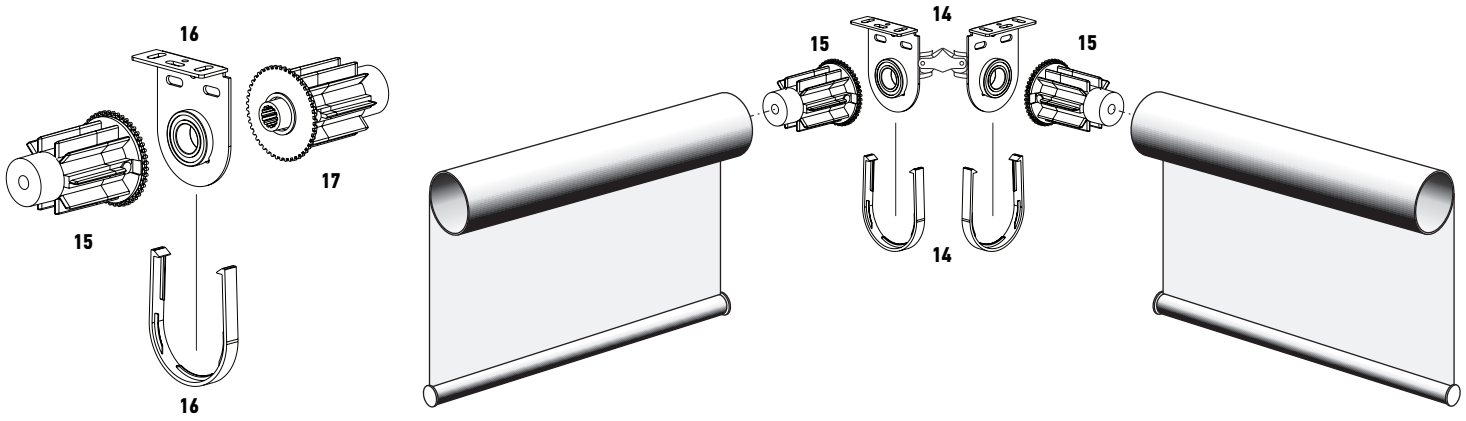

Dimensions and Light Gap Specifications

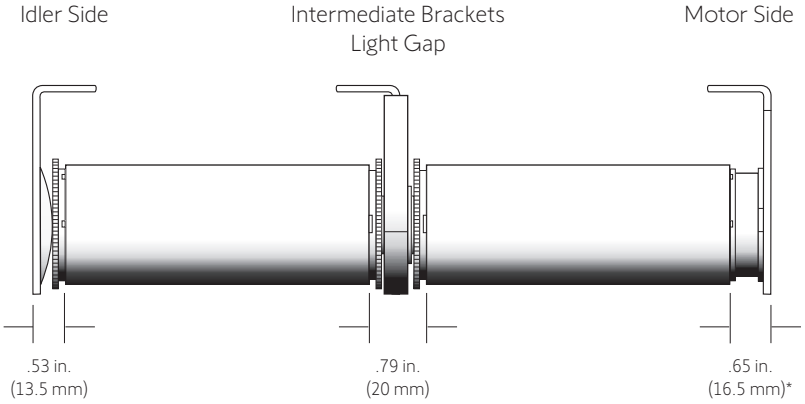

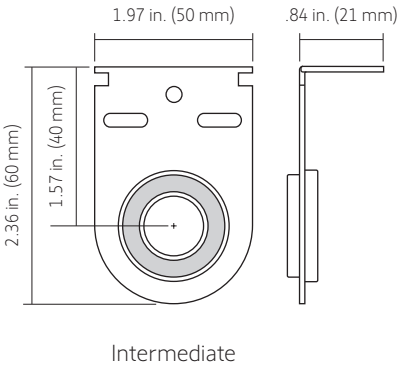

* Includes motor bracket adaptor plate #9013789


Product Chart

Image	Description	Catalog Number
14	Intermediate Bracket & Cover Kit 40p, 0-90 Degrees (Acmeda® Type)	9013787
15	Intermediate Male Idler End Plug (Acmeda® Type)	9013786
16	Intermediate Bracket & Cover Kit 40p (Acmeda® Type)	9013783
17	Intermediate Female Idler End Plug (Acmeda® Type)	N/A

40mm WireFree Hardware Systems

Somfy Decorator Type


Standard Bracket Components

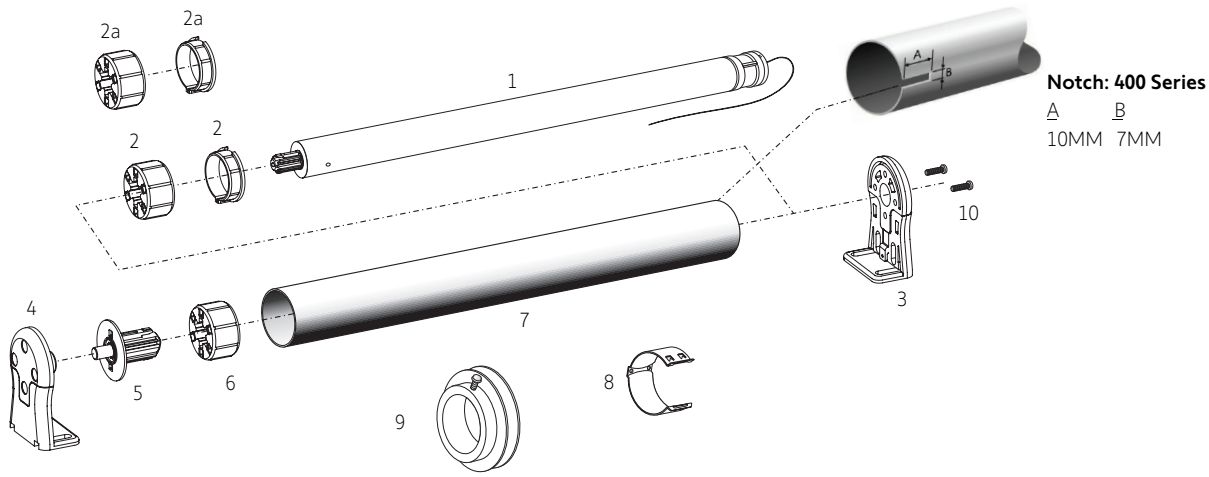

Notch: 400 Series

A	B
10MM	7MM

Dimensions and Light Gap Specifications

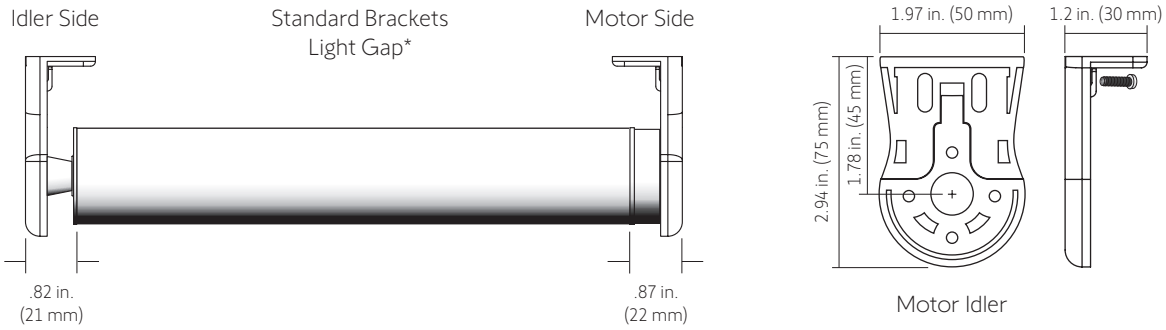

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1	Sonesse® 40 WireFree RTS (Li-ion)	1240485
2	Crown and Drive (Somfy 40mm x 1.5mm Round Tube)	9012224
2A	Crown and Rubberized Drive (Somfy 40mm x 1.5mm Round Tube)	9016654
3	Motor Bracket (Decorator Type)	9500683
4	Idler End Bracket (Decorator Type)	9500685
5	Idler End Plug (8mm Dia. Pin-Decorator Type)	9500688
6	40mm Round Drive only (for use with Idler End Plug)	9147544
7	Somfy 40mm Round Tube (20 ft. Max Length)	1781153
8	40mm Fabric/Cord Clip for Roman Shade Applications	9012200
9	Cord Take-Up Reel (40mm Tube)	1781152
10	M3.5 x 9mm Screws	9014066


40mm WireFree Hardware Systems

Somfy Decorator Type

Standard Bracket Components

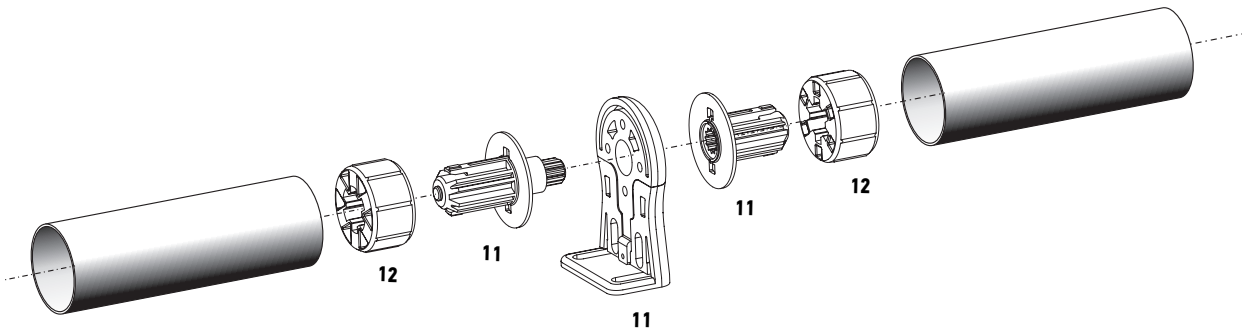

Dimensions and Light Gap Specifications

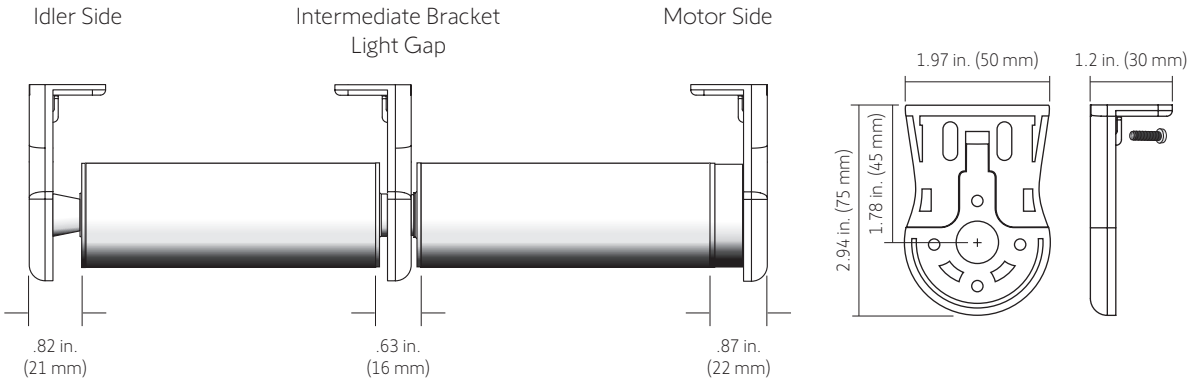


Product Chart

Image	Description	Catalog Number
11	Intermediate Bracket Kit (Decorator Type)	9500687
12	40mm Round Drive only (for use with Int. Bracket)	9147544


40mm WireFree Hardware Systems

RollEase® Skyline

Standard Bracket Components

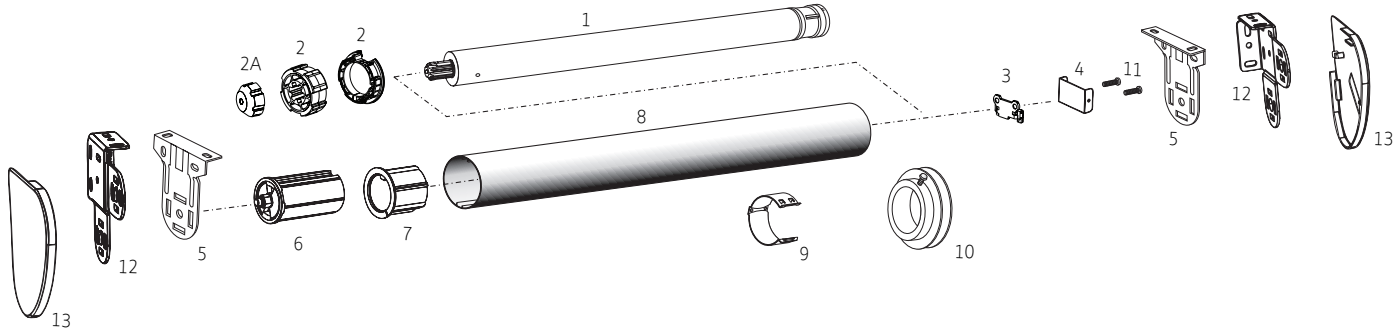

Dimensions and Light Gap Specifications

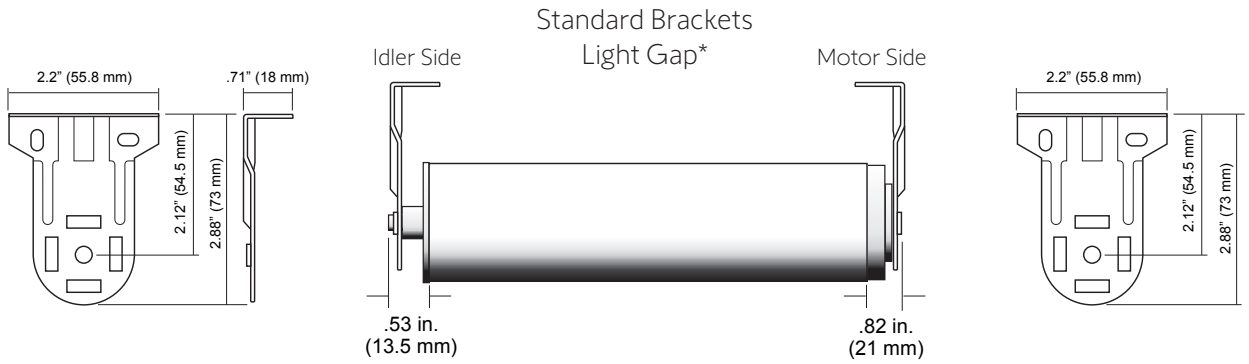

*Dimensions for reference only and may differ depending on Mfg. product changes, installation, etc.


Product Chart

Image	Description	Catalog Number
1	Sonesse® 40 shown	Refer to spec sheet by technology
2	Sonesse® 40 Crown & Drive for RollEase 2" Tube Sonesse® 40 Crown & Drive for RollEase 2.5" Tube Sonesse® 40 Crown & Drive for RollEase 3.25" Tube Sonesse® 40 to 50 Star Head Adaptor	9029184 9029185 9029186 9029373
2A	400 Series Drive Stop with Screw	9147894
3	Sonesse® 30 Motor Plate - RollEase SkyLine and Screws (v2 head)	9026003
4	Silent Motor Mount Clip for SkyLine Bracket	9017255
5	Rollease® Skyline Series Brackets 2"	9016325
6	Rollease® Skyline Series Idler End Plug	5059165
7	Idler Adaptor Collar 2" Profile Tube	9016366
8	2" Profiled Tube	1781798
9	Cord Clips for Roman Shade Applications 2" Tube	9138028
10	Take-Up Reel - Rollease 2" Tube	1781151
11	M3.5 x 9mm Screws	9014066
12	Rollease® Double Bracket	Contact Rollease
13	Rollease® Double Bracket Covers	Contact Rollease

40mm WireFree Hardware Systems

Somfy CTS 40

Cord Take-Up System (CTS)

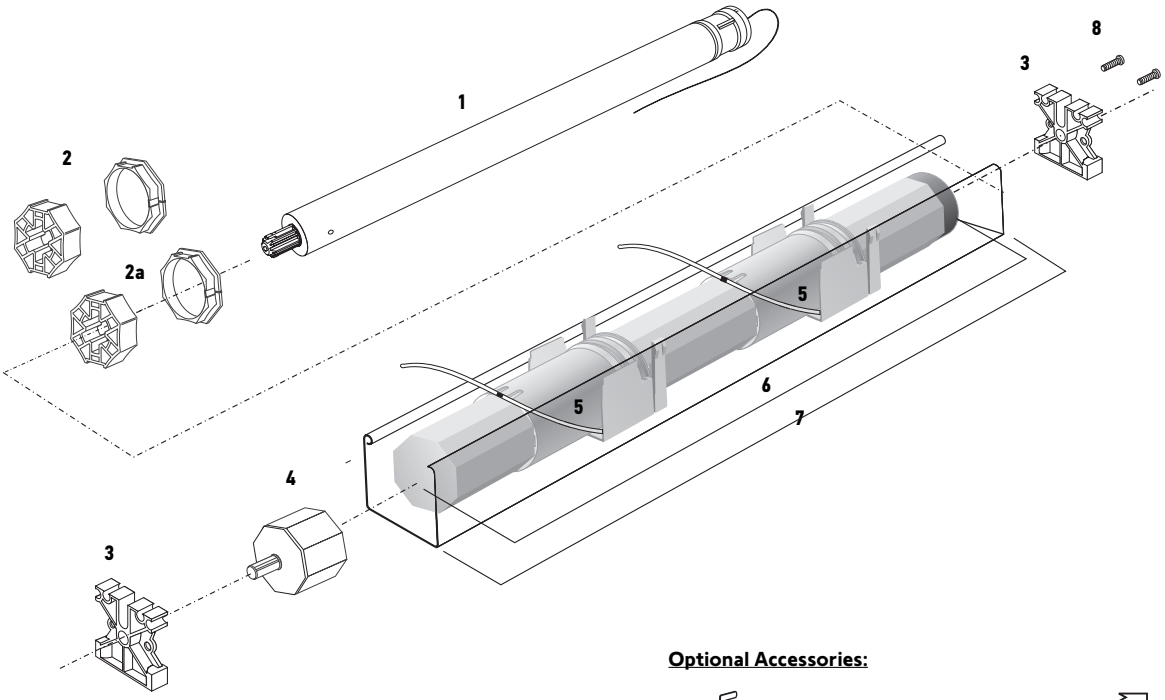

Optional Accessories:

1781134 - 2" Slat Clips for Wood Blinds (White)
1781135 - 2" Slat Clips for Wood Blinds (Ivory)
1781136 - 2" Slat Clips for Wood Blinds (Brown)

1781133 - Ladder Crimp


Product Chart

Image	Description	Catalog Number
1	Sonesse® 40 WireFree RTS (Li-ion)	1240485
2	Crown and Drive Kit (40mm Octagonal Tube)	9012225
2A	Crown and Rubberized Drive Kit (40mm Octagonal Tube)	9016655
3	Motor / Idler Bracket (for 57mm x 51mm Headrail)	9500736
4	Idler End Plug for 40mm Octagonal Tube	9012274
5	CTS 40 (for 57mm x 41mm Headrail)	1781118
6	Somfy 40mm Octagonal Tube (20 ft. Max Length)	1781154
7	57mm x 51mm (2" x 2 1/4") Gutter Rail Or Similar	Contact Manufacturer
8	M3.5 x 9mm Screws	9014066

Bracket, Fascia, and Cassette Solutions

RollEase®

Skyline™ Bracket and Fascia Accessories

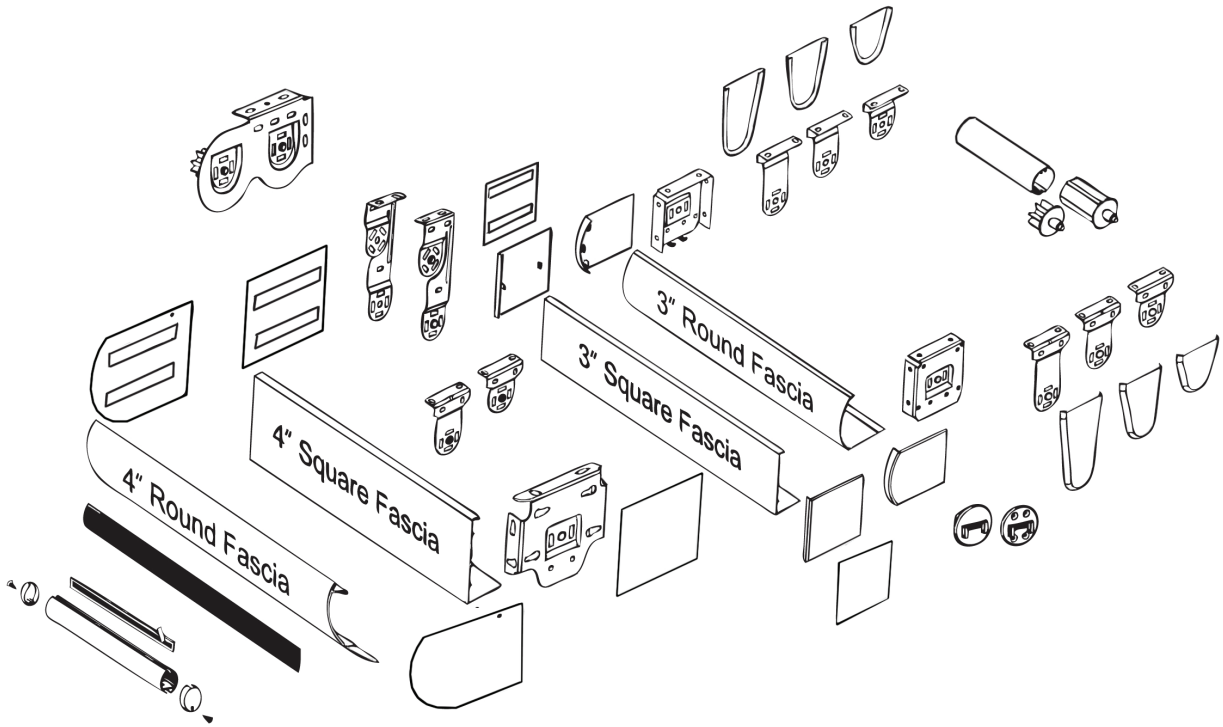


Please Note: for maximum torque limitations please refer to manufacturer's specifications


Bracket, Fascia, and Cassette Solutions

ZMC®

Intermediate Bracket Solutions

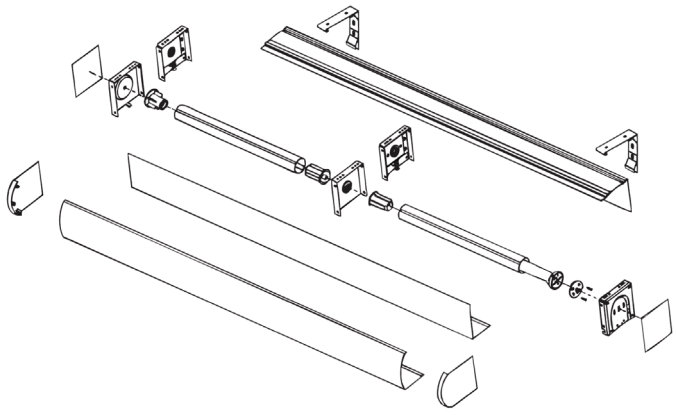

Duo Shade Fascia Components

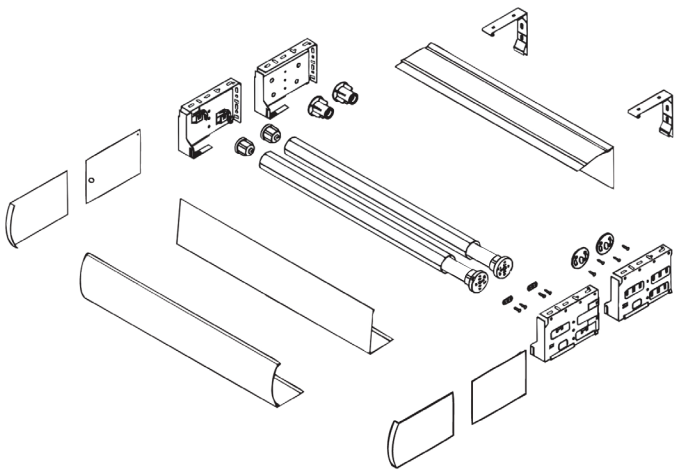

40mm WireFree Mechanical Accessories

400 Series

400 Series to 500 Series Adaptor Kit



- Allows the use of 500 Series crowns and drives with 400 Series motors
- Black composite
- Maximum motor torque - 13 Nm

Part #9013763

400 Series "LO" Bracket w/ a Square Stud



- Motor mounting screws included
- 10mm square stud
- Zinc plated steel
- Maximum motor torque 13 Nm

Part # 9147334

400 Series Drive Stop w/ Screw



- Prevents drive disengagement from 400 series motor shaft
- 1 screw included

Part #9147894

400 Series Motor Bracket



- Compatible with RollEase Bracket
- Stainless steel
- Maximum motor torque - 4 Nm

Part #9012258*

**to be used with M3.5x8MM screw*

400 Series to 500 Series Mounting Conversion Bracket



- White composite
- Allows 400 Series WFmotors to be used w/ 500 Series Star Head motor brackets
- Maximum motor torque - 9 Nm
- 2 screws included

Part #9029373

40mm WireFree Mechanical Accessories

Sonesse® Motor Plates & Head Covers

Item #	Description	Photo	Compatible with
9025996	RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws		AC Zigbee PoE AC RS485
9026001	Rollease 360 R3-R8 10mm x 1.8mm Pin Diameter 7mm and Screws		AC Zigbee PoE AC RS485
9025999	Acmeda 12mm and Screws		AC Zigbee PoE AC RS485
9026003	RollEase SkyLine and Screws		AC Zigbee PoE AC RS485
9026093	M3 x 6mm Philips Flat-Head Plastite (Screw)		AC Zigbee PoE AC RS485
9025997	Rollease 580 R16-24 15.9mm x 1.8mm & Screws		AC Zigbee PoE AC RS485
9026000	Rollease RBGAL 16x3.2mm & Screws		AC Zigbee PoE AC RS485
9026005	Rollease 360 R3-R8 10mm x 1.6mm & Screws		AC Zigbee PoE AC RS485
9027132 9027133 9027134	Motor Head Cover, White (Supplied with Motor) Motor Head Cover, Grey Motor Head Cover, Black		For Zigbee, RTS and PoE Sonesse 30 24V motors
9026090 9026091 9026092	Motor Head Cover, White (Supplied with Motor) Motor Head Cover, Grey Motor Head Cover, Black		For Zigbee, RTS and RS485 Sonesse 40 AC motors
9028931 9028933 9028932	Motor Head Cover, White (Supplied with Motor) Motor Head Cover, Grey Motor Head Cover, Black		For Sonesse 40 WireFree Li-Ion Zigbee USB-C motor only

40mm WireFree Mechanical Accessories

400 Series

Crowns and Drives





400 Series Crown for 40 x 0.8mm Octagonal Tube
Part #9147327




400 Series Drive for 40 x 0.8mm Octagonal Tube
Part #9147545

400 Series 40mm Octagonal Set
Part #9012225



NEW 400 Series Crown and Rubberized Drive for 40mm Octagonal Tube
Part #9016655*





400 Series Crown for 40 x 1.5mm Round Tube
Part #9147330



400 Series Drive for 40 x 1.5mm Round Tube
Part #9147544

400 Series 40mm Round Set
Part #9012224




Crown Adaptor 44mm Tube (Acmeda Type)
Part #9013791



Soft Drive Wheel 44mm (Acmeda Type)
Part #9013790



NEW 400 Series Crown and Rubberized Drive for 40mm x 1.5mm Round Tube
Part #9016654*





400 Series Crown for 40 x 1.5mm Round Tube
Part #9147330



400 Series Drive for 40 x 1.5mm Round Tube
Part #9147544



Crown & Drive for Rollease/ZMC 2" Profiled Tube
Part #9029184*



Crown & Drive for Rollease/ZMC 2.5" Profiled Tube
Part #9029185*



Crown & Drive for Rollease/ZMC 3.25" Profiled Tube
Part #9029186*



400 Series Crown and Drive for HD 4"Silhouette*(Quartette™)
Part #9016953*

*Due to material composition it is recommended to apply a silicon-based lubricant to drive adaptor surface prior to motorized roller tube assembly.
400 Series drive stop with screw (part #9147894) should also be used to prevent drive disengagement during installation or removal.

Top-down Bottom-up 45 WireFree™ Zigbee

COMING SOON

Item #: 1246323



5 YEARS WARRANTY

WireFree™

zigbee

Applications


Top-down
Bottom-up shades

Technical Features

Voltage Supply	12V DC
Cable	AWG22 - 2 Wires
Index Protecting Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic, encoder based
Temperature Working Range	32°F to 140°F (0°C to 60°C)

Temperature Storage Range	-4°F to 140°F (-20°C to 60°C)
Insulation Class	Class III
Antenna	4.72 in. (12cm) wire length, must not be cut nor lengthened. For greatest RF range, the wire should not be in contact with metal surfaces and should be repositioned out of the rail/tube/ cassette.

Dimensions

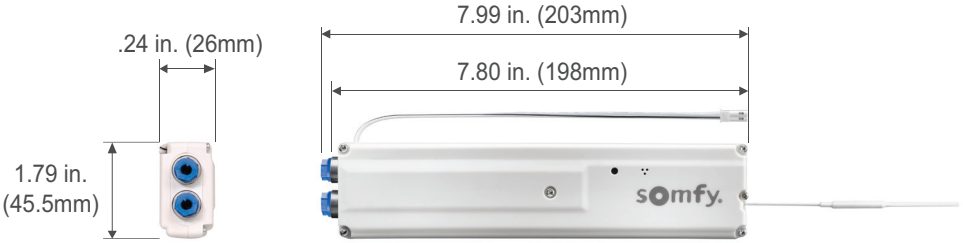

Specifications

Nominal Torque	0.6 Nm
Nominal Speed	40 rpm
Adjustable Speed	20 to 40 by increments of 1 rpm
Sound Level	51 dB(A)*
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Power Supply	12V internal or external headrail battery Plug-in power supply
Battery Type	12V 2600 mAh (lithium-ion rechargeable)
Battery Autonomy	Recharge twice per year
Low Battery Indicator	LED

*Power level at nominal torque and speed

Accessories

9029224	Internal Headrail Battery	
9028923	USB-C Li-ion Fast Charger (with Cable)	
9029622	Headrail Wiring Accessory	

Certifications

FC zigbee c UL us LISTED

Top-down Bottom-up 25 WireFree™ Zigbee

COMING SOON

Item #: 1246325



5 YEARS WARRANTY

WireFree™

zigbee

Applications




Top-down
Bottom-up shades

Technical Features

Voltage Supply	12V DC
Cable	AWG22 - 2 Wires
Index Protecting Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic, encoder based
Temperature Working Range	32°F to 140°F (0°C to 60°C)

Temperature Storage Range	-4°F to 140°F (-20°C to 60°C)
Insulation Class	Class III
Antenna	4.72 in. (12cm) wire length, must not be cut nor lengthened. For greatest RF range, the wire should not be in contact with metal surfaces and should be repositioned out of the rail/tube/ cassette.

Dimensions

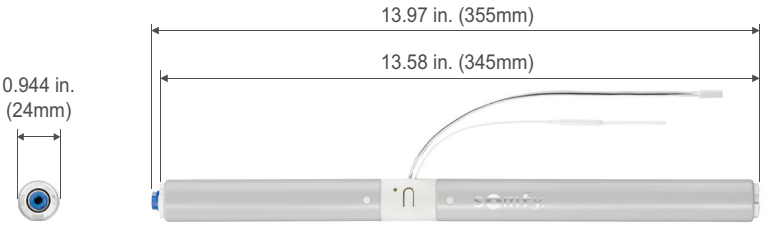

Specifications

Nominal Torque	0.8 Nm
Nominal Speed	40 rpm
Adjustable Speed	20 to 40 by increments of 1 rpm
Sound Level	49 dB(A)*
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Power Supply	12V internal or external headrail battery Plug-in power supply
Battery Type	12V 2600 mAh (lithium-ion rechargeable)
Battery Autonomy	Recharge twice per year
Low Battery Indicator	LED or in app

*Power level at nominal torque and speed

Accessories

9029224	Internal Headrail Battery	
9028923	USB-C Li-ion Fast Charger (with Cable)	

Certifications

FC zigbee certified product c UL us LISTED

Top-down Bottom-up (TDBU)

Hardware Systems and Accessories

Power Accessories

Battery/Power Extension Cables



10" - 9018623



48" - 9016736



96" - 9018624

- For use with all external Zigbee and RTS motors
- For use with Li-ion Battery Pack #9021217
- For use with Reloadable Battery Tube #9018685

USB-C Internal Headrail Li-ion Battery



9029224

- For use with Tilt Li-ion motors (Zigbee and RTS)
- For use with USB-C Li-ion Fast Charger #9028923

USB-C Li-ion Extension Cable



9028565

- For use with USB-C Li-ion motors (Zigbee)

USB-C Magnetic Rigid Cable



9028563

- For use with USB-C Li-ion motors (Zigbee)

USB-C Magnetic Adaptor



9028564

- For use with USB-C Magnetic Rigid Cable #9028563

USB-C Li-ion Fast Charger (with Cable)



9028923

- For use with USB-C Li-ion motors (Zigbee)
- For use with USB-C Li-ion Battery Packs

Headrail Accessories

Shaft Adaptors



Shaft Adaptor Turnils
9026428



Shade Adaptor HT Window
9026430

TDBU Control

Ysia®



Ysia® 5 TDBU Zigbee
1871394

Headrail Accessories (TL25 only)

Headrail Adaptors



Headrail Adaptor for Turnils
9026427



Headrail Adaptors for HT Window
9029519

Headrail Wiring Accessory



Headrail Wiring Accessory
9029622

Cord Lift WireFree™ TLV25 Zigbee (External Battery)

Item #: 1246811

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

zigbee



Applications




Cellular Shades | Pleated Shades | Roman Shades | Horizontal Blinds*

* When used with Somfy CTS40

Technical Features

Voltage Supply	12V DC
Cable	AWG22 - 2 Wires
Index Protecting Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic, encoder based
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Temperature Storage Range	-4°F to 140°F (-20°C to 60°C)
Insulation Class	Class III
Antenna	12cm wire length, must not be cut nor lengthened. For greatest RF range, the wire should not be in contact with metal surfaces and should be repositioned out of the rail/tube/cassette.

Dimensions

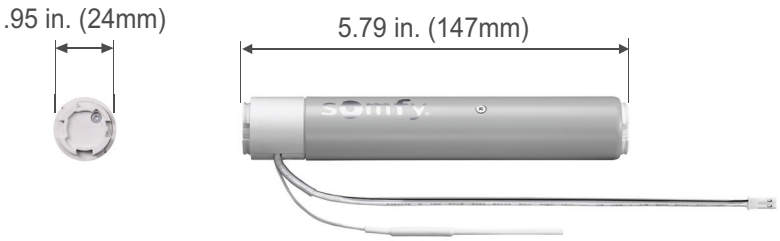

Specifications

Nominal Torque	0.6 Nm
Nominal Speed	Lifting speed: 30 rpm Tilting speed: 18 rpm
Adjustable Speed	Lifting speed: 18-30 rpm by increments of 1 Tilting speed: 10-20 rpm by increments of 1
Sound Level	46 dB(A)*
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Power Supply	12V internal or external headrail battery Plug-in power supply
Battery Autonomy	Only recharge once per year
Low Battery Indicator	LED

*Power level at nominal torque and speed

Accessories

9029224	Internal Headrail Battery	
9028923	USB-C Li-ion Fast Charger (with Cable)	

Certifications

FC | zigbee certified product | c UL us LISTED

Cord Lift WireFree™ TLW25 Zigbee (External Battery)

Item #: 1241780

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

zigbee



Applications



Cellular Shades | Pleated Shades | Roman Shades | Woven Wood

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	12 cm wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions



Specifications

Nominal Torque	0.8 Nm
Nominal Speed	30 rpm
Adjustable Speed	18-30 by increment of 1 rpm
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 2600mAh (external Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	< 4 to 5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day

Certifications

FC | Zigbee 3.0 | c UL us LISTED

Cord Lift WireFree™ TLW25 RTS (External Battery)

Item #: 1003294

5 YEARS WARRANTY

Somfy DESIGNED FOR SILENCE

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications



Cellular Shades | Pleated Shades | Roman Shades | Woven Wood | Horizontal Blinds*


* When used with Somfy CTS25

Technical Features

Voltage Supply	12V DC
Index Protection Rating (interior use only)	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	15cm RF antenna wire must be positioned outside of headrail and should not come in contact with metal surfaces for greatest RF range. RF wire may need to be repositioned for optimal performance. Antenna wire must not be cut.

Dimensions

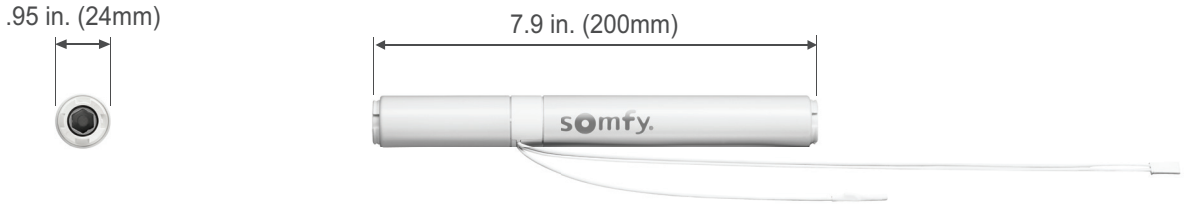

Specifications

Nominal Torque	0.8 Nm
Nominal Speed	30 rpm
Adjustable Speed	18-30 by increment of 1 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (external Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.
Low Battery Indicator	LED (on motor head)

*Based on average shade size and one cycle per day




Certifications

CE EAC


Cord Lift WireFree™ TLV25 & TLW25

Hardware Systems and Accessories

TL25 & TLW25 Cord Lift Systems

System Type	Headrail Profile	Headrail Adaptors	Shaft Adaptors
Turnils		 Headrail Adaptor for Turnils 9026427	 Shaft Adaptor Turnils 9026428
HT Window (Older Version)		 Headrail Adaptors for HT Window 9029519	 Shade Adaptor HT Window 9026430
HT Window (New Version)			

*Contact your local fabricator/distributor for complete products.

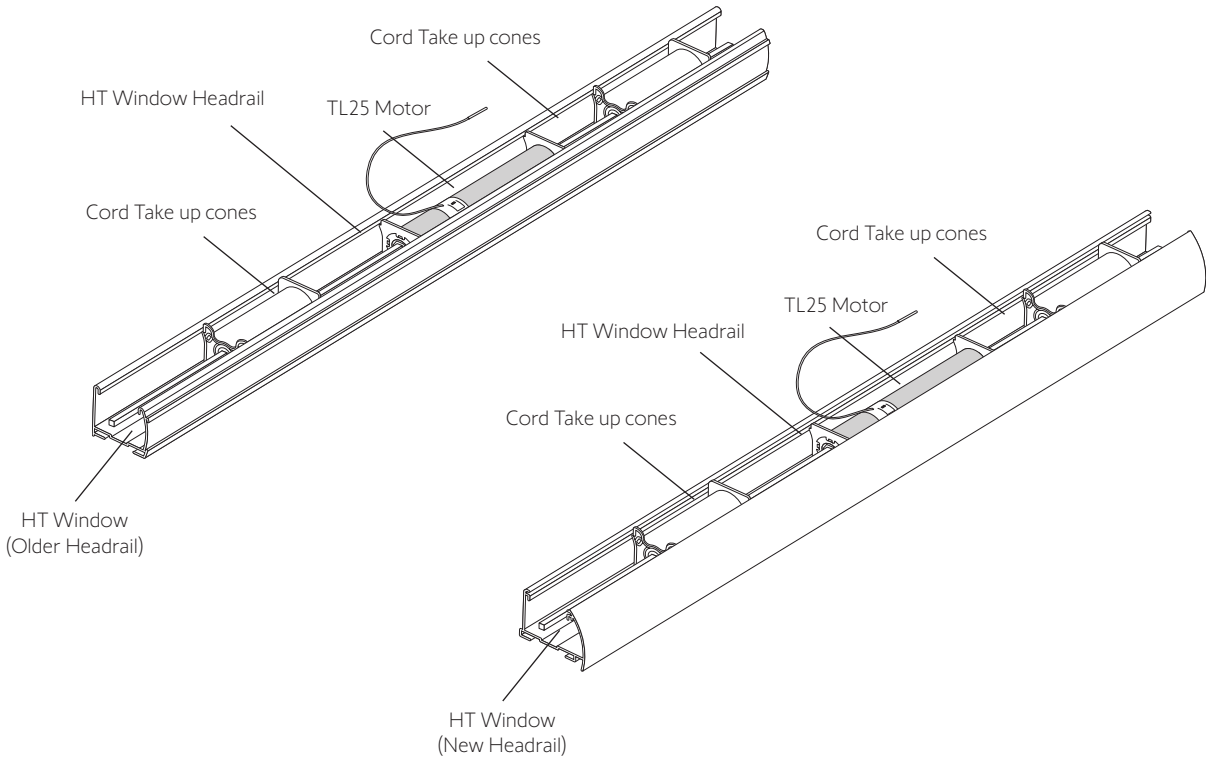

Cord Lift CL32 RTS (External Battery)


Item #: 1002422

5 YEARS WARRANTY

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)

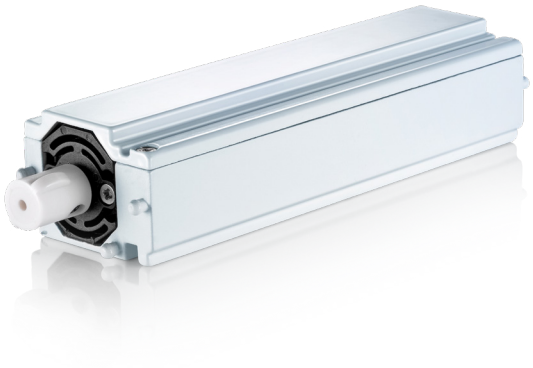

Applications




Cellular Shades | Pleated Shades | Roman Shades

Technical Features

Voltage Supply	DC
Index Protection Rating	IP 20
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	15cm, wire length, must not be cut or lengthened. for greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

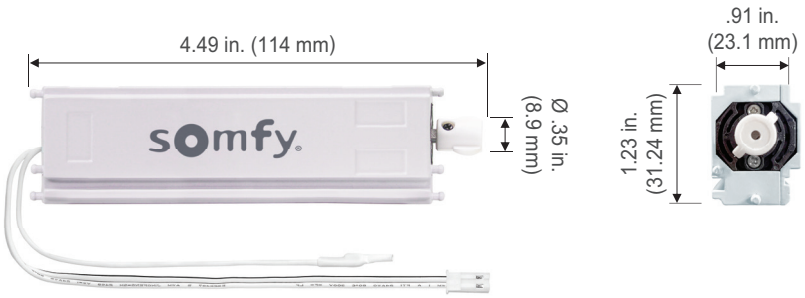

Specifications




Nominal Torque	0.34 Nm
Nominal Speed	68 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (external Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.


*Based on average shade size and one cycle per day

Cord Lift WireFree™ CL32 RTS

Hardware Systems and Accessories





CL32 Traversing Shaft Systems


System Type	Headrail Profile	Headrail Adaptors	Shaft Adaptor
Rollease® 1.5" VersaRail		Not Required	 9013283 Spears Shaft Adaptor
*Graber®/Bali® EasyUp		 9013288	Available through Springs Window Fashions only
*Levolor/Kirsch Accordia (cord loop)		Available through Kirsch/Levolor only	 9013283 Spears Shaft Adaptor

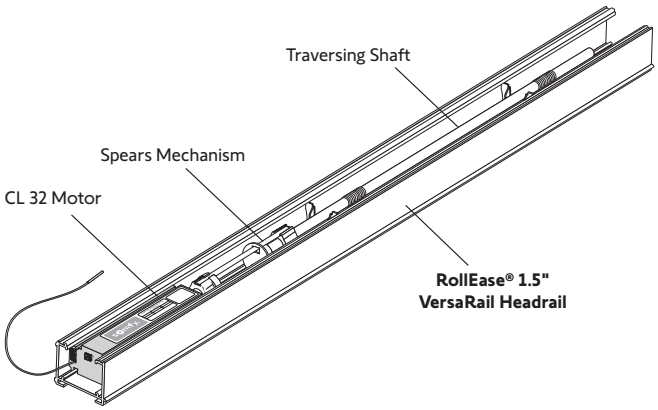

*Contact your local distributor/retailer for complete products.


CL32 (CTS) Cone Systems


System Type	Headrail Profile	Headrail Adaptors	CTS (Cord Take-Up)	Shaft Type	Shaft Adaptor
Rollease® 1.5" VersaRail		Not Required	 9012503* Somfy CTS 5mm Hex	5mm Hex	 9012105
Comfortex/ Turnils Global Headrail		 9015900	Available through Comfortex/ Turnils	"V" Notch	 9015899
Blinds to Go (Smartlift) HT Window Fashions (Clutch)		 9017148	Available through Blinds To Go & HT Window Fashions	4mm Square	 9013269

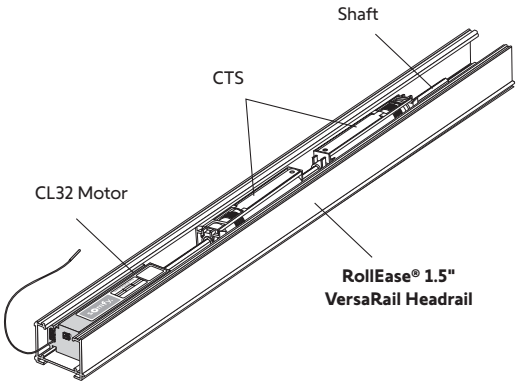

*Special order contact Somfy.

CL32 (CTS) Take-Up Reel Systems

System Type	Headrail Profile	Headrail Adaptors
Kensington Deluxe		 9013443 Headrail Adaptor For Kensington Deluxe Cord Loop

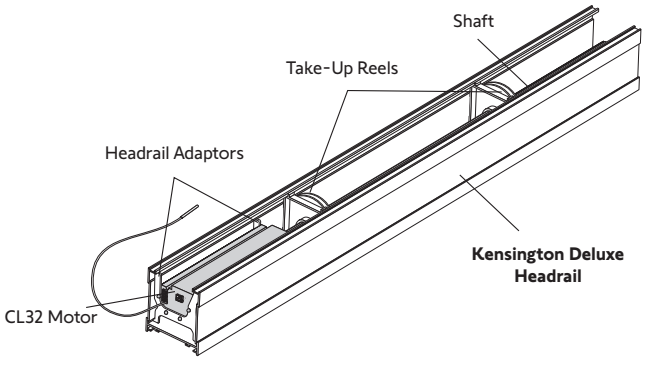

Tilt 50 WireFree™ Through-Shaft Zigbee (External Battery)

Item #: 1241783



Applications




Horizontal Blinds

Technical Features

Voltage Supply	12V DC
Index Protection Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	12 cm wire length, must not be cut or lengthened. For greatest RF range, must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

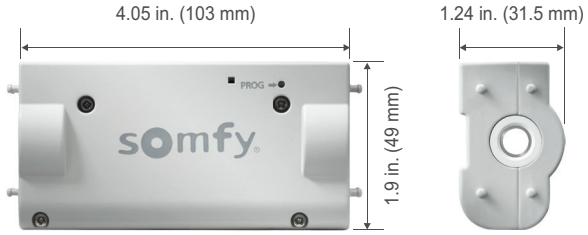

Specifications

Nominal Torque	1 Nm
Nominal Speed	10 rpm
Adjustable Speed	5-10 by increment of 1 rpm
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2
Radio Frequency	2.4 GHz
Battery Type	12V 2600mAh (external Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	< 4 to 5 Hrs.

*Based on average blind size and one cycle per day

Certifications

Tilt Only 50 WireFree™ RTS Through Shaft

Item #: 1240276

5 YEARS WARRANTY

WireFree™

RTS Radio Technology Somfy®

Offers control via Radio Technology Somfy® (RTS)



Applications




Horizontal Blinds

Technical Features

Voltage Supply	12V DC
Index Protection Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic

Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Antenna	17.5cm wire length, must not be cut or lengthened. For greatest RF range must be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

Dimensions

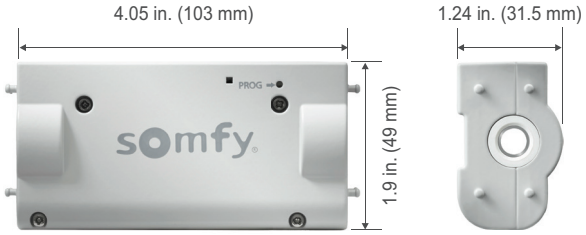

Specifications

Nominal Torque	1 Nm
Nominal Speed	10 rpm
Adjustable Speed	5-10 by increment of 1 rpm
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Type	12V 2600mAh (external Lithium-ion)
Battery Autonomy	Only recharge once per year*
Charging Time	4.5 Hrs.


*Based on average blind size and one cycle per day

Certifications


CE NOM EAC

Tilt 50 WireFree™ RTS

Hardware Systems and Accessories

System Type	Headrail Profile	Headrail Adaptors	Shaft Adaptors*
1.5 in. x 2.25 in. (38mm x 57mm) Low Profile Headrail		 Headrail Adaptor for Decora Sun Headrail 9025739	 6mm Hexagonal Shaft Adaptor 9025928  5.5mm Hexagonal Shaft Adaptor 9025929  5mm Hexagonal Shaft Adaptor 9025930
1.5 in. x 2.25 in. (38mm x 57mm) Low Profile Graber®/Bali® (SureClose™)		 Low Profile Headrail Adaptor 9025743	 6mm Square Shaft Adaptor 9025931  6.4mm Square Shaft Adaptor 9025932  4mm Square Shaft Adaptor 9027060
2 in. x 2.25 in. (51mm x 57mm) Gutter Rail		 Gutter Headrail Adaptors 9025742	 D Shaft Adaptor 9027062

*Shaft adaptor colors may vary

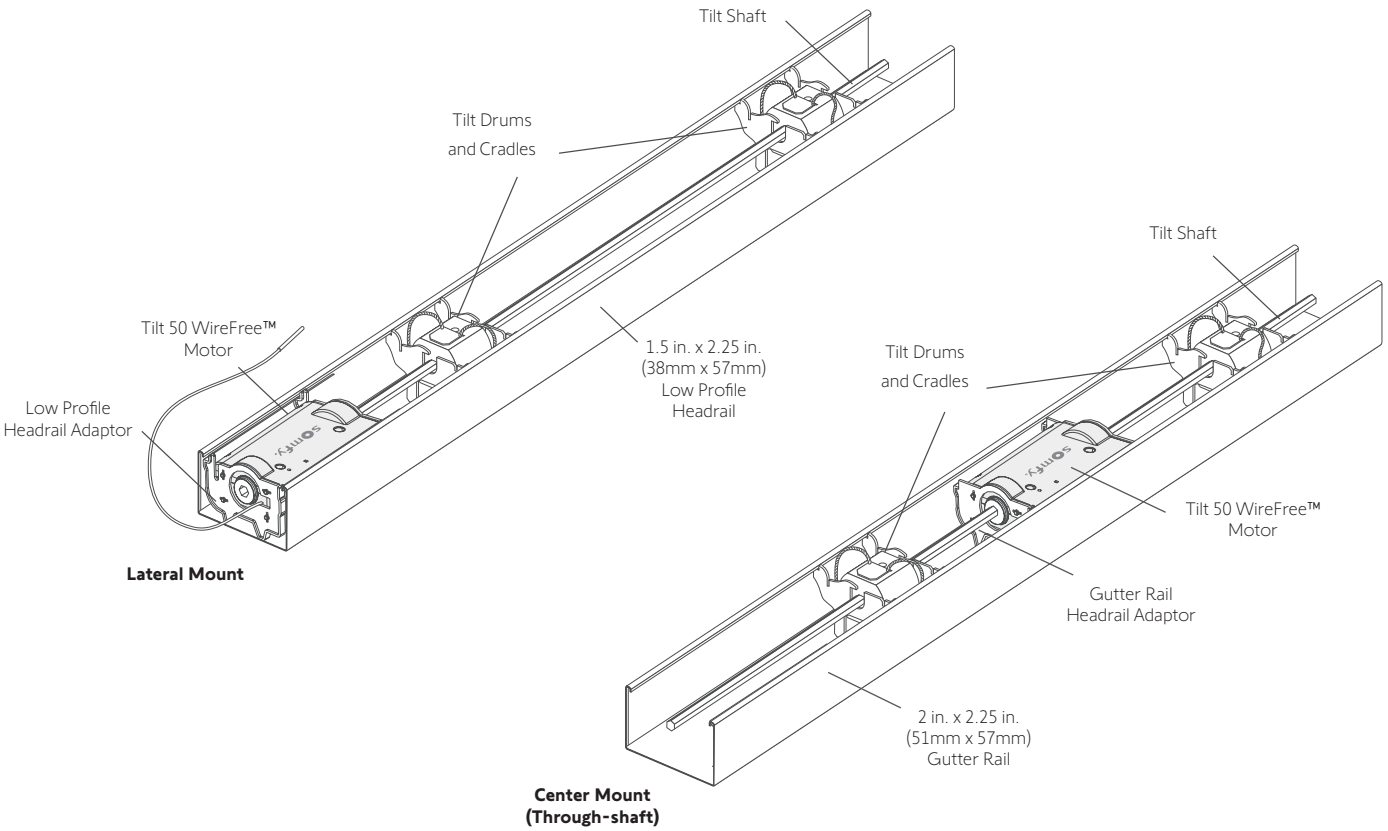

WireFree Controls

Zigbee® Technology

TaHoma® switch



TaHoma® switch
1871037

TaHoma® switch
(with ethernet adaptor)
1871038



TaHoma® switch
Ethernet Adaptor
9028054

Smart Plug



Smart Plug Zigbee
1871217

Ysia®



Ysia® 1 Zigbee
1871153



Ysia® 5 Zigbee
1871154



Ysia® 5 Variation Zigbee
1871281



Ysia® 5 TDBU Zigbee
1871394

DecoFlex WireFree™ Wall Switches



DecoFlex WireFree™ Zigbee,
White 2 Channel

Surface-mount
1871577

In-wall
1871573



DecoFlex WireFree™ Zigbee,
White 4 Channel

Surface-mount
1871576

In-wall
1871572

Radio Technology Somfy® (RTS)

Situo & Telis Collections



Situo® 1 RTS
Pure Single
Channel Remote
1870571



Situo® 5 RTS
Pure Five
Channel Remote
1870575



Situo® 5 RTS
Soliris Five
Channel Remote
1870579



Situo® 5 RTS
Variation Five
Channel Remote
1811612



Telis 16 Channel RTS
Pure Remote with
On-screen display
1811081



Telis 16 Channel RTS
Silver Remote with
On-screen display
1811082



Telis 1 Chronis RTS
Pure Timer with
On-screen display
1805237

NOTE: for additional information regarding Zigbee® or RTS controls, contact Somfy Systems, Inc.

WireFree Controls

Radio Technology Somfy® (RTS)

DecoFlex WireFree™ Wall Switches



DecoFlex 1
Channel RTS
WireFree™ Wall Switch
White
1810897
Black
1810899



DecoFlex 2
Channel RTS
WireFree™ Wall Switch
White
1811068
Black
1811067



DecoFlex 3
Channel RTS
WireFree™ Wall Switch
White
1811071
Black
1811070



DecoFlex 4
Channel RTS
WireFree™ Wall Switch
White
1811074
Black
1811073



DecoFlex 5
Channel RTS
WireFree™ Wall Switch
White
1810813
Black
1810830

- Wall Switches shown in white. Black finish is also available.
- Switches are shown assembled with printed channel buttons.
- Custom engraved buttons are also available.



Black



DecoFlex WireFree™
3-Button
White
1870908



DecoFlex WireFree™
Surface 5 Channel
White
1871025

- Wall Switches are only available in white.

Table Top Accessories



DecoFlex WireFree™
RTS Table Top
Accessory
Black
1811051*



DecoFlex WireFree™
RTS Table Top
Accessory
Silver
1810972*



DecoFlex WireFree™
RTS Table Top
Accessory
White
1811185*

*DecoFlex Switch is sold separately from Table Top Accessory.

Smoove® Wall Switches



Smoove® 1 RTS Pure II
181361



Smoove® 4 RTS Pure II
181381

- Battery-operated convenience
- Surface mounts with ease
- Frames available in 3 colors



Pure Silver Matte Black

Dry Contact

DRY CONTACT

TaHoma®



TaHoma® switch
1871037

TaHoma® switch
(with ethernet adaptor)
1871038

16 Channel RTS Interface



TaHoma® switch
Ethernet Adaptor
9028054



Universal RTS Interface 16-Channel
(Converts IR, RS232, RS485 to RTS)

1810872

RTS Dry Contact Interface



RTS Dry Contact Interface
Single Channel


1810493

NOTE: For additional information regarding Zigbee® or RTS controls, contact Somfy Systems, Inc.

WireFree USB-C Power Accessories

Solar Panel and Hardware Accessories

USB-C Li-ion Solar Panel



9029114

- For use with all Zigbee USB-C motors
- For use with all external battery motors using USB-C Li-ion Battery Pack #9028930 and USB-C Internal Headrail Li-ion Battery Pack # 9029224

Bracket for USB-C Li-ion Solar Panel



9029127

- For use with USB-C Li-ion Solar Panel #9029114

Tape & Swab for USB-C Li-ion Solar Panel



9029180

- Included with USB-C Li-ion Solar Panel #9029114

Power Accessories

USB-C Li-ion External Battery Pack



9028930

- For use with all external Zigbee and RTS battery motors
- For use with battery charger #9028923

Replacement Mounting Clips for Li-ion Battery Pack



9027701

- Included with Li-ion Battery Pack #9028930

USB-C Internal Headrail Li-ion Battery



9029224

- For use with internal headrail motors (Zigbee and RTS)
- For use with USB-C Li-ion Fast Charger #9028923

USB-C Li-ion Fast Charger (with Cable)



9028923

- For use with USB-C Li-ion motors (Zigbee)
- For use with USB-C Li-ion Battery Packs

USB-C Li-ion Extension Cable



9028565

- For use with USB-C Li-ion motors (Zigbee)

USB-C Magnetic Rigid Cable



9028563

- For use with USB-C Li-ion motors (Zigbee)
- For use with USB-C Li-ion Battery Packs

USB-C Magnetic Adaptor




9028564

- For use with USB-C Magnetic Rigid Cable #9028563

WireFree Power Accessories

Solar Panel and Hardware Accessories

Li-ion Solar Panel Kit



9027294

(Includes: Solar panel, 4 panel mounting brackets and glass mount adhesive)

- For use with V2 Li-ion Motors
- For use with all external battery motors using rechargeable Li-ion Battery Pack #9021217

Solar Panel Mounting Bracket Kit



9015897

- Included with Li-ion Solar Panel Kit #9027294

Power Accessories

Rechargeable Li-ion Battery Pack



9021217

- For use with all external Zigbee and RTS battery motors
- For use with battery charger #9025166

Single 12V DC Reloadable Battery Tube



9018685

- For use with all external battery motors
- Requires 8 AA lithium-ion batteries #9014834

Lithium-ion Charger



9025166

- For use with V2 Li-ion motors (Zigbee and RTS)
- For use with Rechargeable Li-ion Battery Pack #9021217

12V DC Plug-In Power Supply



1870940

- For use with all external battery motors
- Eliminates use of batteries

8 AA Lithium Battery Package Tubes



9014834

- For use with Reloadable Battery Tube #9018685

WireFree Power Accessories

Power Accessories

Li-ion Charging Extension Cable



9021131

8" Extension Cable

- For use with V2 Li-ion motors
- For use with Rechargeable Li-ion Battery Pack #9021217

Magnetic Rigid Cable



9028560

- For use with 9028562 Magnetic adaptor. Compatible with all V2 Li-ion Motors and Li-ion battery pack #9021217

Dual 12V DC Reloadable Battery Tube "Y" Harness



9018625

- Used to connect (2) 12V DC Reloadable Battery Tubes #9018685

Battery/Power Extension Cables



10" - 9018623



48" - 9016736



96" - 9018624

- For use with all external Zigbee and RTS motors
- For use with Li-ion Battery Pack #9021217
- For use with Reloadable Battery Tube #9018685

Power Hardware Accessories

Replacement Mounting Clips for Li-ion Battery Pack



9027701

- Included with Li-ion Battery Pack #9021217

Replacement Mounting Clips for Battery Tube



9013263

- Included with Reloadable Battery Tube #9018685

DECOFLEX ZIGBEE ENGRAVING FORM

USA: https://www.somfypro.com/decoflex-custom-button

Canada: https://www.somfypro.ca/decoflex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State: ___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #: _____

Area: _____

Room: _____

ENGRAVING OPTIONS

Keypad Configuration (choose one)

☐ 2 Channel Surface-mount #1871577

☐ 2 Channel In-wall #1871573

☐ 4 Channel Surface-mount #1871576

☐ 4 Channel In-wall #1871572

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)


☐ Text only - *Centered only (Sentence case)*
☐ 1-line ☐ 2-line

☐ Icon only
Centered only


☐ Text and icon
Icon centered, text below (Sentence case)

Buttons (A-D)
9 Characters Maximum (including spaces) **QTY.**

A1									☐
A2									
B1									☐
B2									
C1									☐
C2									
D1									☐
D2									

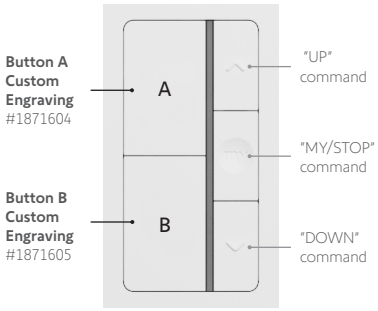

2 Channel



4 Channel

Pictogram Options

Buttons (A-D)
Use numeric code **QTY.**

A		☐
B		
C		
D		

01 Roller shades	02 Horizontal shades	03 Cellular shades	04 Layered shades	05 Draperies	06 Top-down Bottom-up	07 Awnings	08 Rolling shutters	09 Insect screens
10 Lamps	11 Light bulbs	12 On/Off	13 Plug	14 Kitchen	15 Patio	16 Living room	17 Dining room	
18 Bedroom	19 Bathroom	20 Entryway/ Mud room	21 Lanai	22 Sunroom	23 Bar	24 Theater	25 Family room	

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491

DECOFLEX WIREFREE™ SURFACE 5 CHANNEL BUTTON ENGRAVING FORM

USA: https://www.somfypro.com/decoflex-custom-button

Canada: https://www.somfypro.ca/decoflex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____

Area: _____


Room: _____

ENGRAVING OPTIONS

(F): *Command Button by default is labeled STOP on the DecoFlex Range of keypads.*
G *and* ***H*** *buttons by default are labeled as follows:*
*- **G** = down icon*
*- **H** = up icon*

	Buttons (A-E) 9 Characters Maximum (including spaces)	QTY.
A		
B		
C		
D		
E		

DecoFlex WireFree™ Surface 5 Channel #1871025

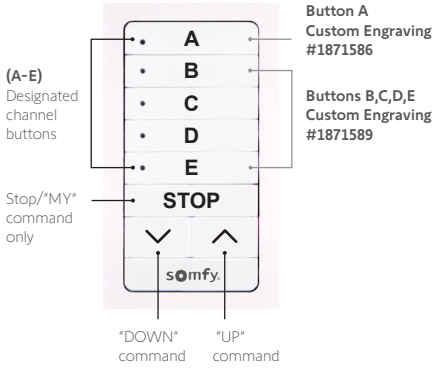

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail to: Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Parkway
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

6411 Edwards Blvd
Mississauga, ON L5T 2P7
CN: (800) 66-SOMFY
F: (905) 564-6446

DECOFLEX KEYPAD BUTTON ENGRAVING FORM

USA: https://www.somfypro.com/decoflex-custom-button

Canada: https://www.somfypro.ca/decoflex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name: _____

Address: _____

City: _____ State: ___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #: _____ Order #: _____

Area: _____

Room: _____

STYLE

Button Color:

☐ White #9018259

☐ Black #9018261

Switch Type:

☐ RTS

☐ Somfy Digital Network (SDN) RS485
Including the SDN Group Keypad. Available in White only.

☐ Dry Contact
Available in White only.

ENGRAVING OPTIONS


Buttons (A-F)
9 Characters Maximum (including spaces) **QTY.**

A										
B										
C										
D										
E										
F										
G										
H										


***(F):** Command Button by default is labeled STOP on the DecoFlex Range of keypads.*
***G** and **H** buttons by default are labeled as follows:*
*(**G** = down icon) WHITE - #9018263 BLACK - #9018265*
*(**H** = up icon): WHITE - #9018267 BLACK - #9018269*

If you prefer they can be substituted with an associated command NAME (UP, DOWN, LOWER, etc.) up to 5 characters.


DecoFlex RTS



DecoFlex SDN (Standalone or Group)



DecoFlex Dry Contact



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail to: Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (800) 22-SOMFY
F: (609) 395-1300

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (877) 22-SOMFY
F: (561) 995-7502

California
15301 Barranca Parkway
Irvine, CA 92618-2201
T: (877) 72-SOMFY
F: (949) 727-3510

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

6411 Edwards Blvd
Mississauga, ON L5T 2P7
CN: (800) 66-SOMFY
F: (905) 564-6446

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address Drop Ship

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

SINGLE GANG ENGRAVING OPTIONS

OPTION 1: Smoove® 1 RTS

Complete section for the desired option

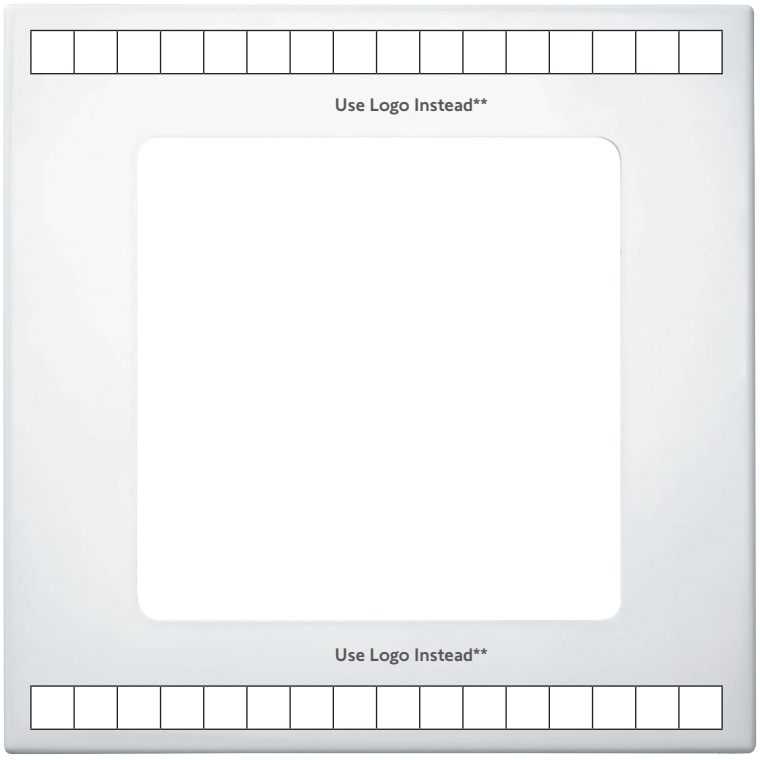

***Logo specs: Maximum dimension: 1.97 in (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

Choose only 1

Smoove Frame, Pure
#9027376 *(Frame Only)*

Quantity: ☐

Smoove 1 RTS Pure
#1871191 *(Switch + Frame)*

Quantity: ☐

Example:



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

ALL LETTERS CAPITALIZED (Default) First Letters Capitalized As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address Drop Ship

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

SINGLE GANG ENGRAVING OPTIONS

OPTION 2: Smoove® 4 RTS

Complete section for the desired option

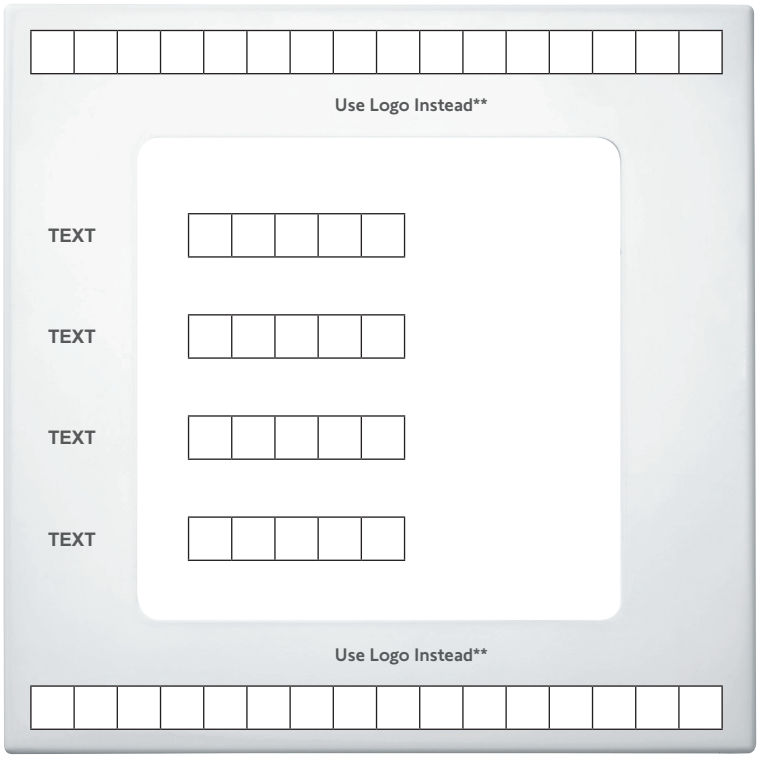

***Logo specs: Maximum dimension: 1.97 in (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

Choose only 1


Smoove Frame, Pure
#9027376 *(Frame Only)*

Quantity: ☐

Smoove 4 RTS Pure
#1871192 *(Switch + Frame)*

Quantity: ☐

Example:



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

ALL LETTERS CAPITALIZED (Default) First Letters Capitalized As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address Drop Ship

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

DUAL GANG ENGRAVING OPTIONS

OPTION 3: Dual Gang Vertical

Complete section for the desired option

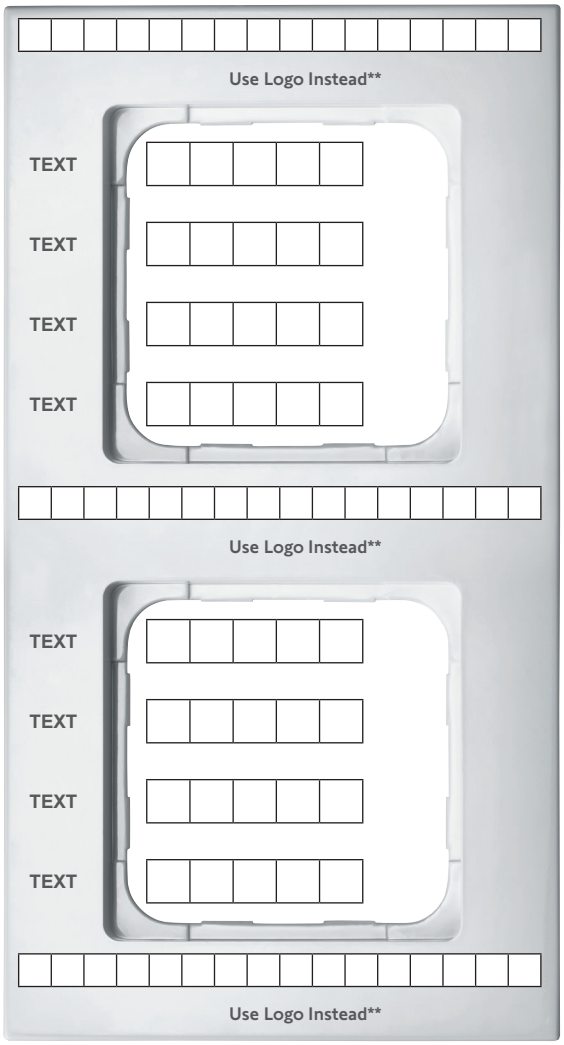

***Logo specs: Maximum dimension: 1.97 in (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

Smoove Double Frame, Pure
#9027377 *(Frame Only)*

Quantity:

Examples:





Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

ALL LETTERS CAPITALIZED (Default)

First Letters Capitalized

As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address Drop Ship

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

DUAL GANG ENGRAVING OPTIONS


OPTION 4: Dual Gang Horizontal

Complete section for the desired option

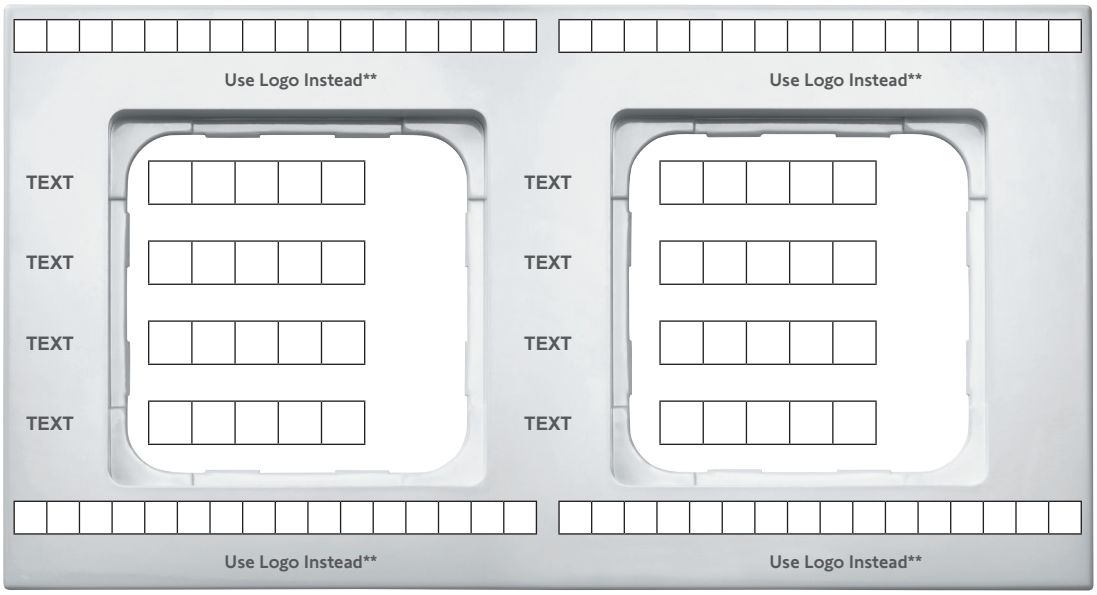

***Logo specs: Maximum dimension: 1.97 in (5cm) wide x .39 in. (1cm) high. File format (type): .dxf files only*

Examples:





STYLE OPTIONS

Smoove Double Frame, Pure
#9027377 *(Frame Only)*

Quantity: _____

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ALL LETTERS CAPITALIZED (Default) First Letters Capitalized As written in above section

Payment terms of your account will apply. All engraved frames are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail to: Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Parkway
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

6411 Edwards Blvd
Mississauga, ON L5T 2P7
CN: (800) 66-SOMFY
F: (905) 564-6446

© Somfy Systems, Inc. • Photos : © Semaphore • **JULY 2026**
Zigbee® is a registered trademark of Connectivity Standards Alliance.
All brands, products, and trademarks are the property of their respective owners.

somfy®

Make the move

About Somfy®

For over 50 years, Somfy has been pioneering innovative motorization and automated solutions for window coverings and exterior shading products. With comfort, ease of use, security, and sustainability in mind, our seamless and connected solutions are designed to help people make the move to living spaces impactful for humans and with a reduced impact on nature.

A BRAND OF SOMFY GROUP

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491