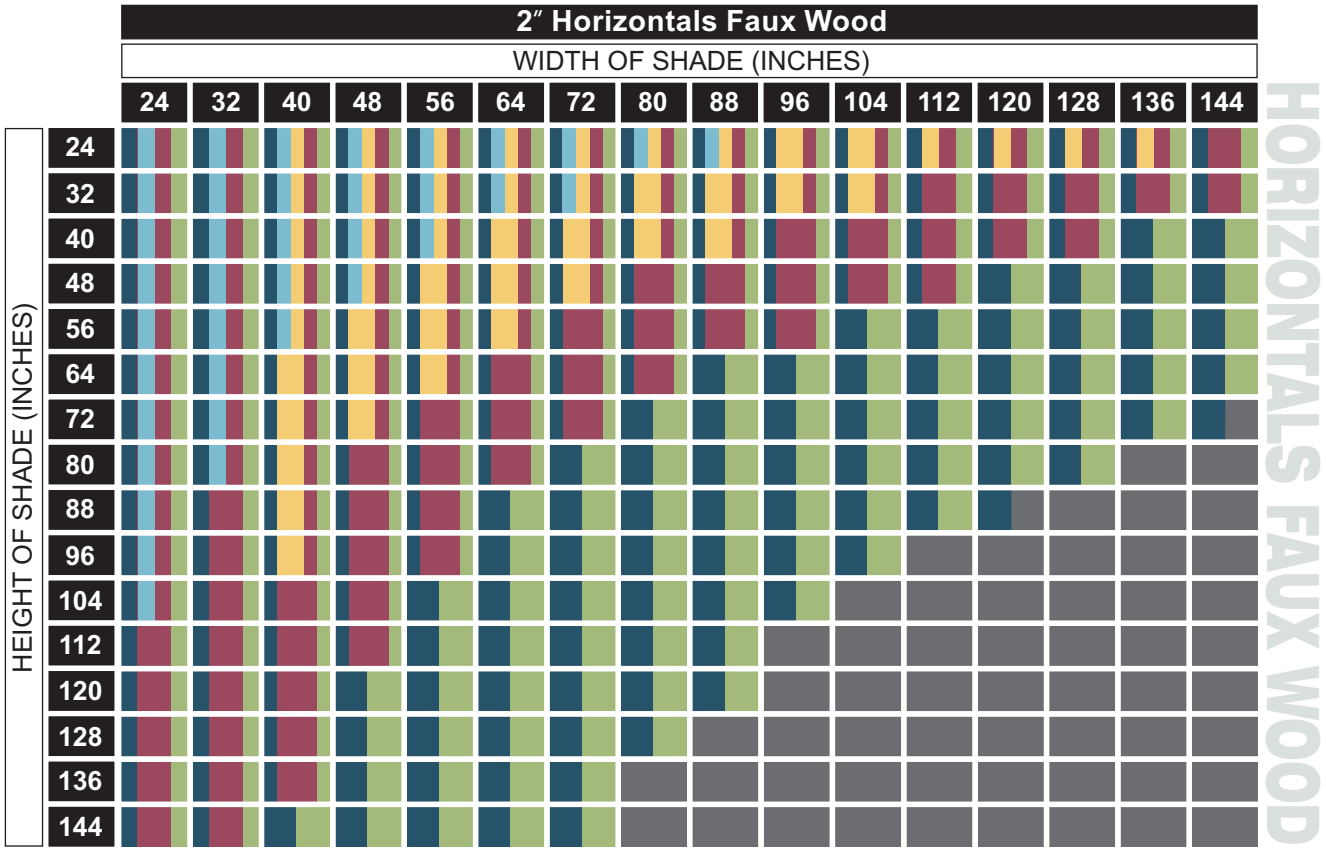


WireFree (tilt only)	Battery Powered or Plug-in	RTS, INFRARED
Sonesse™ 30	24V DC (Low Voltage) Plug-in or In-Wall Wired	RTS, WIRED TECHNOLOGY
Sonesse™ 50	120V AC Plug-in or In-Wall Wired	RTS, INFRARED, WIRED TECHNOLOGY
QV-35	24V DC (Low Voltage) Plug-in or In-Wall Wired	RTS, INFRARED, WIRED TECHNOLOGY
LS40 Standard	120V AC Plug-in or In-Wall Wired	RTS, INFRARED, WIRED TECHNOLOGY
	Contact your fabricator or Somfy for application (dimensions) not denoted in chart above.	

WireFree (tilt only): Calculations based on use of standard manufacturer components/hardware

Sonesse™ 30: Calculations based on use of Somfy CTS 40 system. (headrail 2″ x 2 1/4″) Min. finished width = (OB 20″)

Sonesse™ 50: Calculations based on use of Somfy CTS 50 system. (headrail 2 3/4″ x 2 3/4″)
Min. finished width = (standard wired motor = OB 35″) (RTS & ILT motors = OB 37 1/4″)

QV-35 Calculations based on use of Somfy CTS 25 system. (headrail 2″ x 2 1/4″) Min. finished width = 23.5″

LS40 Standard Calculations based on use of standard LS409 R2 motor Somfy CTS 40 system.
Min. finished width = (OB 21″)

Above chart calculations are based on use of 2 inch Faux Wood horizontal blind slats (approx. .599 lbs./sq ft.) and associated bottom bar/weights.

The above chart is for reference only and may not be representative of certain horizontal blind offerings. Results may vary depending on horizontal blind application.

If using cord take-up systems other than listed above, consult with your fabricator for blind size limitations.